

Description

Coaxial Cable for underground installation with side pipe - 75 Ohm

Underground installation cable (Screening Class A)


Coaxial Cables

CAVEL®

since 1968

Data Sheet

11/48LOPIPE

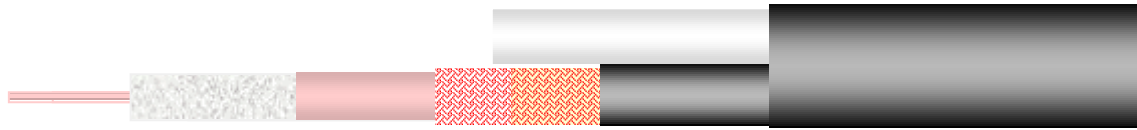

| | | | | | |
|------|-------|----------|------|--------------|------|
| 1,13 | 4,80 | 4,90 | 5,30 | 15,30 x 7,30 | 8,10 |
| (Cu) | (PEG) | (Cu/Pet) | (Cu) | (PE) | (PE) |

Constructive data

| | | | |
|-------------------------------------------------------|----------|-------------|----|
| Inner conductor of plain copper | (Cu) | 1,13 ± 0,02 | mm |
| Dielectric of physical foam polyethylene | (PEG) | 4,80 ± 0,10 | mm |
| Water repellent sealing (dielectric) | (Jelly1) | | |
| Outer Copper/Polyester tape longitudinally overlapped | (Cu/Pet) | | |
| Braid of annealed copper wires | (Cu) | | |
| Braid optical coverage (IEC 96-1) | | 53 % | |

Data Sheet

Sheath Colour

| | | |
|--------------------------------------------------------------|-------------|------------------------|
| Tracer Identifier | Year + Flag | mm |
| Diameter under Sheath | | 5,30 mm |
| Inner sheath of Polyethylene black with carbonblack (Q4) | (PE) | 7,30 ± 0,10 mm |
| Outer sheath of Polyethylene - black - with carbonblack (Q4) | (PE) | 15,30 x 8,10 ± 0,10 mm |

Printed each meter by yellow ink-jet :

CAVEL 1.1/4.80 LO + PIPE MADE IN ITALY 75 Ohm EN50117 ss/aa - m

(ss=week, aa=year) (m=meter marking)

| | | | | | |
|----------------------------------------|--------|-------|---|-------------|----|
| Side Pipe in High Density Polyethylene | (HDPE) | Inner | ∅ | 5,50 ± 0,20 | mm |
| | | Outer | ∅ | 7,20 ± 0,20 | mm |

Electrical data

| | | |
|-----------------------------------------------|--------|--------|
| Characteristic impedance (@ 200 MHz) | 75 ± 3 | Ohm |
| Capacitance (@1kHz) | 52 ± 2 | pF/m |
| Velocity factor | 85 % | |
| Outer conductor resistance | 13,50 | Ohm/km |
| Loop resistance | 31,50 | Ohm/km |
| Insulation voltage of the sheath (spark test) | 8 | KV |
| Maximum current (Ieff) | 8,00 | A |

Structural return loss (SRL)

| | |
|-----------------|--------|
| 5 - 470 MHz | >30 dB |
| 470 - 1000 MHz | >28 dB |
| 1000 - 2000 MHz | >26 dB |
| 2000 - 3000 MHz | >22 dB |

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

16/12/2008

Responsible

Giuseppe Guastella

Description

Coaxial Cable for underground installation with side pipe - 75 Ohm

Underground installation cable (Screening Class A)



Data Sheet

11/48LOPIPE

Screening attenuation (SA)

| | |
|-----------------|--------|
| 30 - 1000 MHz | >85 dB |
| 1000 - 2000 MHz | >85 dB |
| 2000 - 3000 MHz | >70 dB |

Transfer impedance

5 - 30 MHz > 0,5 mOhm/m

Attenuation (at 20°C):

| Frequency [MHz] | Attenuation [dB/100m] | Frequency [MHz] | Attenuation [dB/100m] |
|-----------------|-----------------------|-----------------|-----------------------|
| 5 | 1,50 | 862 | 16,80 |
| 10 | 2,10 | 1000 | 17,90 |
| 30 | 2,90 | 1750 | 24,80 |
| 50 | 3,80 | 2150 | 27,34 |
| 200 | 7,90 | 2400 | 29,10 |
| 300 | 9,70 | 3000 | 33,00 |
| 470 | 12,00 | | |


Mechanical data

| | | |
|--------------------------------------------------|-------|-------|
| Weight of copper conductors | 22,30 | kg/km |
| Total weight of cable | 76,61 | kg/km |
| Minimum bending radius (single/repeated bending) | 50 | mm |
| Max. cable pulling strength | 200 | N |

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type : 11/48 LO PIPE

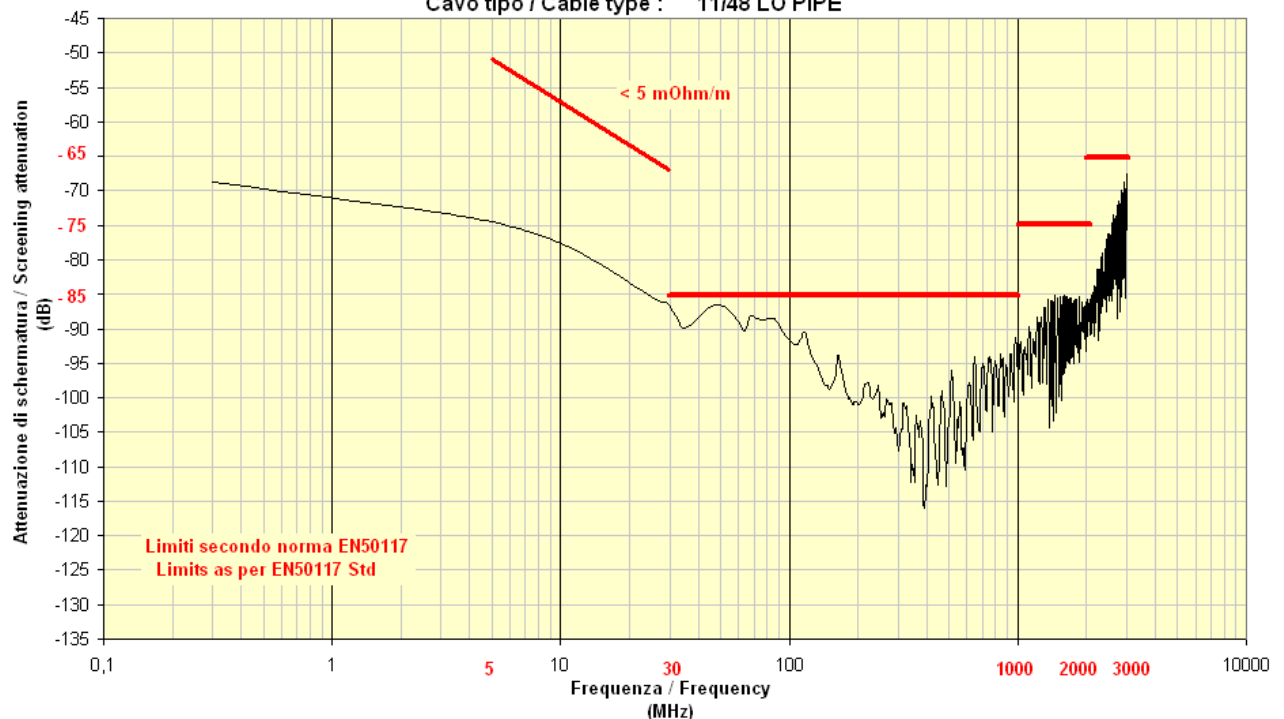

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

16/12/2008

Responsible

Giuseppe Guastella

Description

Coaxial Cable for underground installation with side pipe - 75 Ohm

Underground installation cable (Screening Class A)

**Data Sheet****11/48LOPIPE****Connector**

- FA125** F male twist-on connector for indoor installation, nitin-plated brass - 30,0 x 12,0 mm
- F125A** F male crimp connector for indoor installation, nitin-plated brass - 24,0 x 12,0 mm
- FC703** F male compression connector for outdoor installation, nitin-plated brass - 30,0 x 12,0 mm
- BNCC703** BNC male compression connector for outdoor installation, nitin-plated brass - 35,0 x 14,0 mm
- FM-21** F male connector for outdoor and underground installation, nitin-plated brass - 48,5 x 15,5 mm

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212**Date****16/12/2008****Responsible****Giuseppe Guastella**