

## Description

Indoor drop coaxial cable - 75 Ohm  
Indoor installation cable (Screening Class B)



## Data Sheet

SAT703N



1,13 (Cu)	4,80 (PEG)	4,90 (Al/Pet/Al)	5,30 (CuSn)	6,60 (PVC)
--------------	---------------	---------------------	----------------	---------------

## Constructive data

Inner conductor of plain copper	(Cu)	1,13 ± 0,02 mm
Dielectric of physical foam polyethylene	(PEG)	4,80 ± 0,10 mm
Water repellent sealing (dielectric)	(Jelly1)	
Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)	
Braid of tinned copper wires	(CuSn)	
Braid optical coverage (IEC 96-1)		45 %
Diameter under Sheath		5,30 mm
Outer sheath of Polyvinylchloride - black - lead-free (Q1B)	(PVC)	6,60 ± 0,10 mm

Printed each meter by yellow ink-jet :

**CAVEL SAT 703 N MADE IN ITALY 75 Ohm EN50117-2-4 CEI-UNEL 36762 C-4 (U0 =400V) ss/aa m**

(ss=week, aa=year) (m=meter marking)

## Electrical data

Characteristic impedance (@ 200 MHz)		75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity factor		85 %	
Outer conductor resistance		22	Ohm/km
Loop resistance		40	Ohm/km
Insulation voltage of the sheath (spark test)		3	kV
Maximum current (Ieff)		8,00	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>26 dB		
2000 - 3000 MHz	>22 dB		
Screening attenuation (SA)			Transfer impedance
30 - 1000 MHz	>80 dB	5 - 30 MHz	1,5 mOhm/m
1000 - 2000 MHz	>80 dB		
2000 - 3000 MHz	>70 dB		

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

11/07/2008

Responsible

PierPaolo Piccinini

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable (Screening Class B)

Coaxial Cables

CAVEL®

since 1968

Data Sheet

SAT703N

Attenuation (at 20°C):

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,60	862	17,10
10	2,10	1000	18,50
30	3,20	1750	24,90
50	4,10	2150	27,90
200	7,90	2400	29,60
300	9,80	3000	33,40
470	12,40		


## Mechanical data

Weight of copper conductors	14,45	kg/km
Total weight of cable	39,49	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Max. cable pulling strength	150	N

## Attenuazione di schermatura / Screening Attenuation

Cavo classe B / B Class Cable

Cavo tipo / Cable type : SAT703N

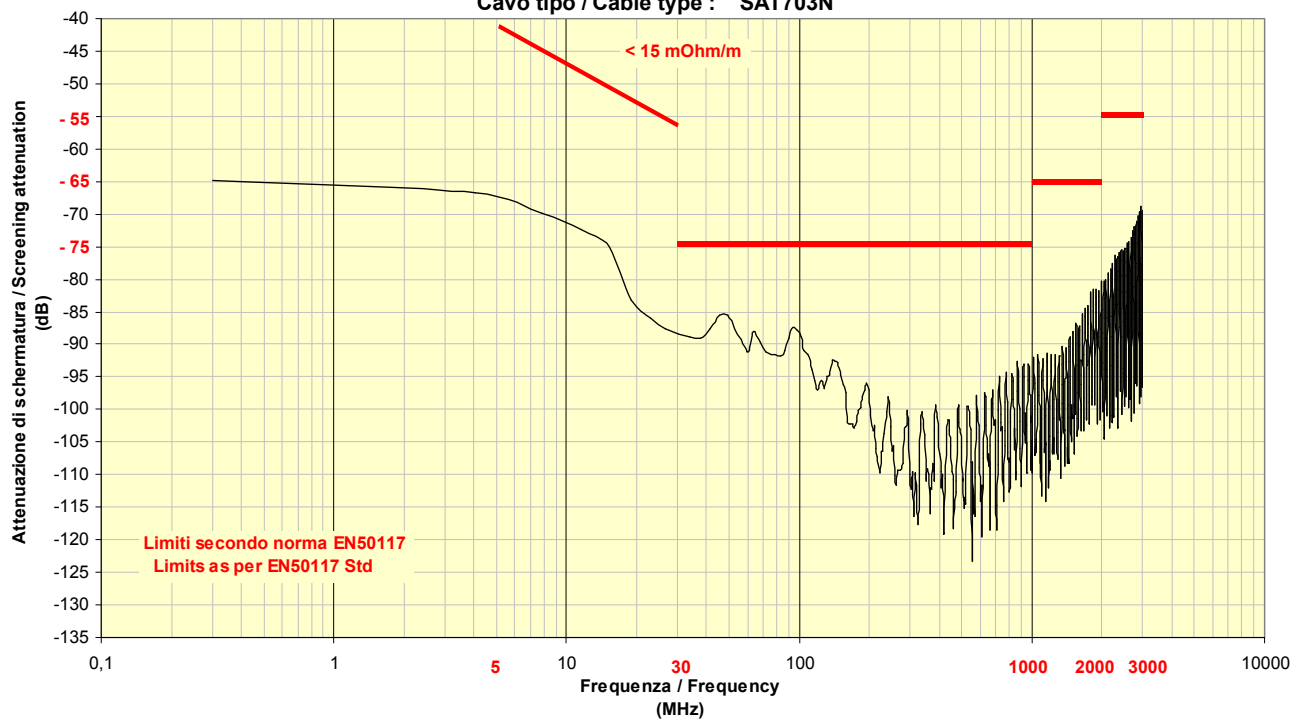

## Connector

<b>F703</b>	F male crimp connector for indoor installation, nitin-plated brass - 21,0 x 12,0 mm
<b>FA703</b>	F male twist-on connector for indoor installation, nitin-plated brass - 22,0 x 12,0 mm
<b>FC703</b>	F male compression connector for outdoor installation, nitin-plated brass - 30,0 x 12,0 mm
<b>BNCC703</b>	BNC male compression connector for outdoor installation, nitin-plated brass - 35,0 x 14,0 mm

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

11/07/2008

Responsible

PierPaolo Piccinini