

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

17VATC

|   |      |       |             |        |       |
|---|------|-------|-------------|--------|-------|
| Ø | 1,13 | 4,80  | 4,90        | 5,30   | 6,80  |
|   | (Cu) | (PEG) | (Al/Pet/Al) | (CuSn) | (PVC) |

## Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-4

## Reaction to Fire

EN50575

## Construction data

|   |             |               |    |
|---|-------------|---------------|----|
| Inner conductor of plain copper                             | (Cu)        | Ø 1,13 ± 0,02 | mm |
| Dielectric of physical foam polyethylene                    | (PEG)       | Ø 4,80 ± 0,10 | mm |
| Aluminum/Polyester/Aluminum tape longitudinally overlapped  | (Al/Pet/Al) |               |    |
| Water repellent sealing (dielectric)                        | (Jelly1)    |               |    |
| Braid of tinned copper wires                                | (CuSn)      |               |    |
| Braid optical coverage (IEC 96-1)                           |             | 45            | %  |
| Diameter over Braid   |             | Ø 5,30        | mm |
| Outer sheath of Polyvinylchloride - white (PVC) - lead-free | (PVC)       | Ø 6,80 ± 0,10 | mm |
| Printed each meter by blue ink-jet :                        |             |               |    |

**CAVEL 17VATc/PH MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V)**  
gggaan m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

|  |           |       |
|--|-----------|-------|
| Weight of copper conductors                      | 14,45     | kg/km |
| Total weight of cable                            | 40,42     | kg/km |
| Minimum bending radius (single/repetead bending) | 35/70     | mm    |
| Maximum cable pulling strength                   | 150       | N     |
| Minimum installation temperature                 | -5        | °C    |
| Operating temperature                            | -40 / +80 | °C    |

## Electrical data

|                                       |         |        |        |
|---------------------------------------|---------|--------|--------|
| Characteristic impedance              | 200 MHz | 75 ± 3 | Ohm    |
| Capacitance (@1kHz)                   |         | 52 ± 2 | pF/m   |
| Velocity Ratio                        |         | 85 %   |        |
| Inner conductor resistance            |         | 18     | Ohm/km |
| Outer conductor resistance            |         | 22     | Ohm/km |
| Loop resistance                       |         | 40     | Ohm/km |
| Sheat Insulation voltage (spark test) |         | 3      | kV     |
| Maximum current (Ieff)                |         | 8      | A      |

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

PierPaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable



Data Sheet

**17VATC**

**Structural return loss (SRL)**

|                 |        |
|-----------------|--------|
| 5 - 470 MHz     | >30 dB |
| 470 - 1000 MHz  | >28 dB |
| 1000 - 2000 MHz | >26 dB |
| 2000 - 3000 MHz | >22 dB |

**Screening Attenuation (SA)**

|                 |                   |
|-----------------|-------------------|
|                 | <b>SA-Class A</b> |
| 30 - 1000 MHz   | >85 dB            |
| 1000 - 2000 MHz | >80 dB            |
| 2000 - 3000 MHz | >70 dB            |

**Transfer Impedance (Zt)**

|            |                   |
|------------|-------------------|
| 5 - 30 MHz | <b>Zt-Class C</b> |
|            | < 27 mΩ/m         |

**Attenuation (at 20°C )**

| Frequency [MHz] | Attenuation [dB/100m] | Frequency [MHz] | Attenuation [dB/100m] |
|-----------------|-----------------------|-----------------|-----------------------|
| 5               | 1,60                  | 800             | 16,40                 |
| 10              | 2,10                  | 862             | 17,10                 |
| 30              | 3,20                  | 1000            | 18,50                 |
| 50              | 4,10                  | 1750            | 24,90                 |
| 200             | 7,90                  | 2150            | 27,90                 |
| 300             | 9,80                  | 2400            | 29,60                 |
| 470             | 12,40                 | 3000            | 33,40                 |


**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A / A Class Cable**

Cavo tipo / Cable type :

17 VATC

Data / Date : 24-10-2007

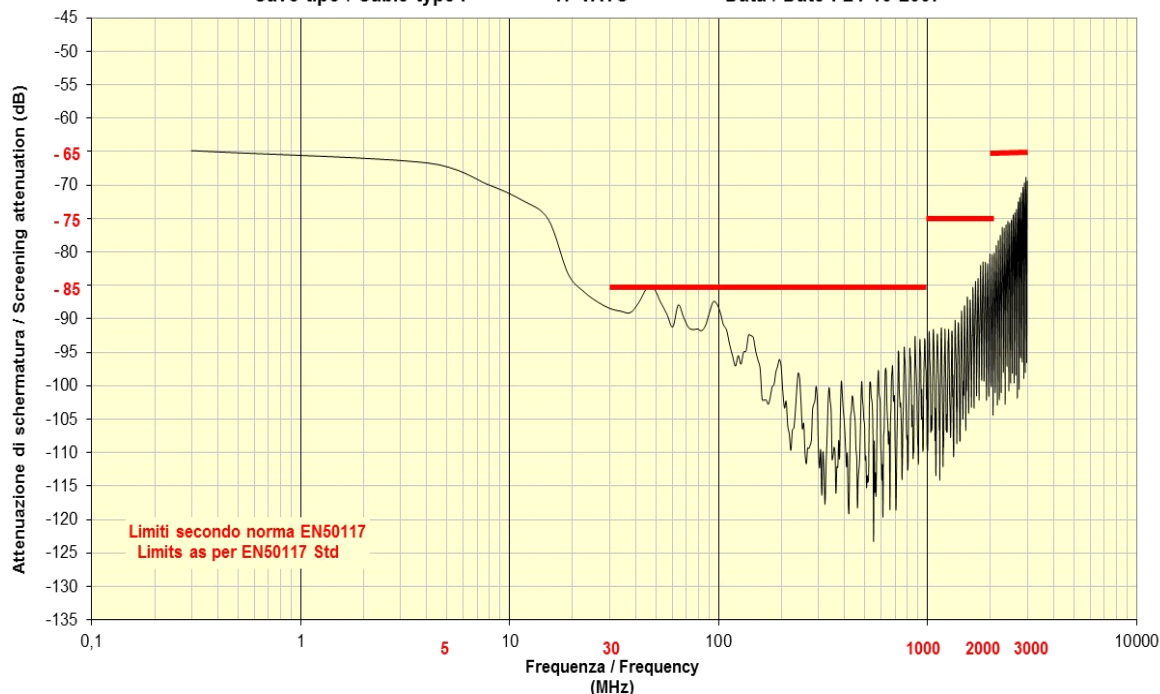

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

PierPaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

**Data Sheet****17VATC****Connectors**

|                 |   |
|-----------------|---|
| <b>BNCC703</b>  | Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm |
| <b>F703</b>     | Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm                  |
| <b>F90</b>      | Series F Crimp, F Crimp, for INDOOR installation  |
| <b>FA17</b>     | Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm            |
| <b>FA703</b>    | Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm            |
| <b>FC7.0QM</b>  | Series F Compression, Quick Mount, for OUTDOOR installation   |
| <b>FC703</b>    | Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm     |
| <b>FCEM7.0C</b> | Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass                         |
| <b>FCPO5.1C</b> | Series F Compression, Ø 5,1 Push-On, for OUTDOOR installation, nitin-plated brass                         |
| <b>FR703</b>    | Series F Crimp, F crimp, "Rapid", for INDOOR installation   |
| <b>IECF5.1C</b> | Series IEC (toolless), female, no tool, for INDOOR installation   |
| <b>IECF90C</b>  | Series IEC (toolless), Ø 5,1 90° female, for INDOOR installation  |
| <b>IECF703</b>  | Series IEC Compression, female, no tool, for OUTDOOR installation   |
| <b>IECM5.1C</b> | Series IEC (toolless), male, no tool, for INDOOR installation   |
| <b>IECM90C</b>  | Series IEC (toolless), Ø 5,1 90° male, for INDOOR installation  |
| <b>IECMC703</b> | Series IEC Compression, male, for OUTDOOR installation  |
| <b>FC703C</b>   | Series F Compression, F Compression, for OUTDOOR installation   |

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****PierPaolo Piccinini**