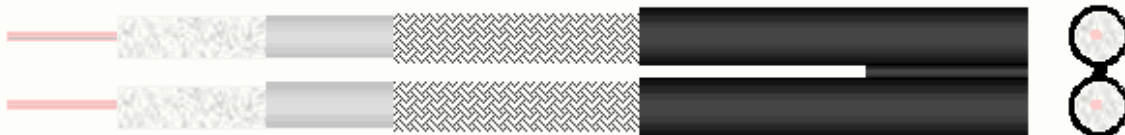


Description

"siamese" drop coaxial cable - 75 Ohm

Security sheath of LSZH material

**Data Sheet****2X17VATCM****Class CPR acc. to UE 305/2011 (DoP)**

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-5

Construction data

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,80 ± 0,10	mm
Outer Aluminium/Polyester/Aluminium tape longitudinally overlapped	(Al/Pet/Al)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		45	%
Outer sheath of Thermoplastic material - black - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 14,60 x 6,80 ± 0,20	mm
Printed each 50 cm by ink-jet :			

CAVEL 2x17VAtCM/PH MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-5 CEI-UNEL 36762 C-4 (U0 = 400V) gggaan

(gggaan=batch)

Physical data

Weight of copper conductors	28,89	kg/km
Total weight of cable	82,00	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km
Outer conductor resistance		22	Ohm/km
Loop resistance		40	Ohm/km
Sheat Insulation voltage (spark test)		3	kV
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>26 dB		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

20/09/2017

Responsible

Alberto Scardovi

Description

"siamese" drop coaxial cable - 75 Ohm

Security sheath of LSZH material



Data Sheet

2X17VATCM

2000 - 3000 MHz >22 dB

Screening Attenuation (SA)

SA-Class A

Shield Transfer Impedance (Zt)

Zt-Class C

30 - 1000 MHz

>85 dB

5 - 30 MHz

< 27 mΩ/m

1000 - 2000 MHz

>80 dB

2000 - 3000 MHz

>70 dB


Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,60	800	16,40
10	2,10	862	17,10
30	3,20	1000	18,50
50	4,10	1750	24,90
200	7,90	2150	27,90
300	9,80	2400	29,60
470	12,40	3000	33,40

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type: 2 x 17 VATCM

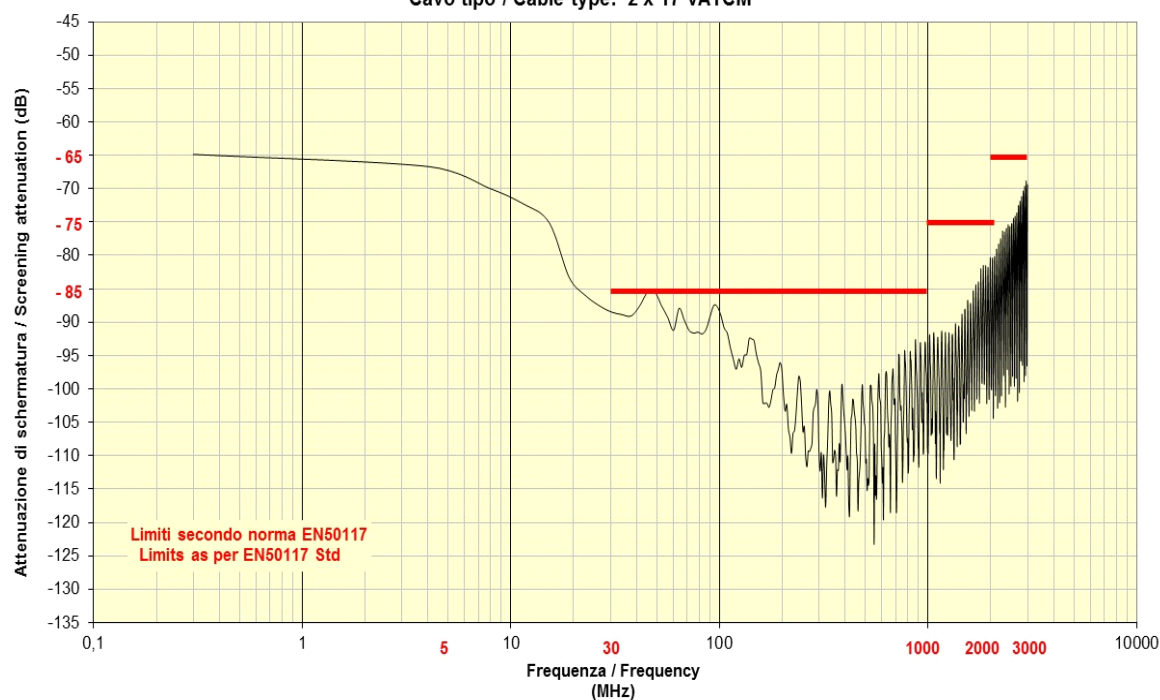

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

20/09/2017

Responsible

Alberto Scardovi