

**Description**

Distribution and trunk coaxial cable with messenger rope - 75 Ohm

Outdoor cable for hung-up installation (Screening Class A+)


Coaxial Cables

**CAVEL®**

since 1968

**Data Sheet****34/145AP**

(FeZn) 7x0,80

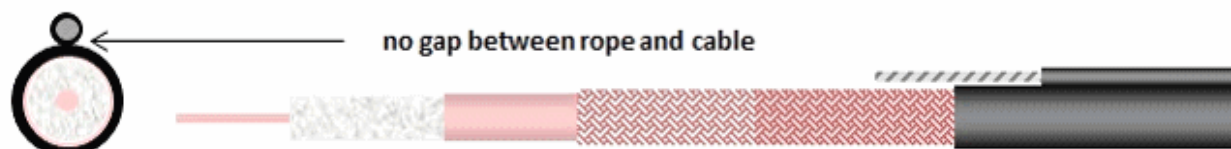

Ø	3,40	14,50	14,66	15,26		24,20 x 19,80
	(Cu)	(PEG)	(Cu)	(Cu)	(Jelly2)	(PE)

**Class CPR acc. to UE 305/2011 (DoP)**

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

**Standards**

EN 50117-2-3

**Reaction to Fire**

EN50575

**Construction data**

Inner conductor of plain copper	(Cu)	Ø 3,40 ± 0,10	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 14,50 ± 0,15	mm
Copper tape longitudinally overlapped	(Cu)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of annealed copper wires	(Cu)		
Braid optical coverage (IEC 96-1)		61	%
Tracer Identifier	Year + Flag		
Water repellent sealing (sheath)	(Jelly2)		
Diameter over Braid		Ø 15,26	mm
Outer sheath of Polyethylene - black - with carbonblack	(PE)	Ø 24,20 x 19,80 ± 0,20	mm
Messenger rope of zinc-plated steel	(FeZn)	7x0,80	mm

Printed each meter by yellow ink-jet :

**CAVEL 3.4/14.5 AP MADE IN ITALY 75 Ohm Euroclass Fca EN50117-2-3 gggaan m**

(ggg=day)(aa=year)(n=batch) (m=meter marking)

Messenger Maximum tensile strength	500	kg
------------------------------------	-----	----

**Physical data**

Weight of copper conductors	153,52	kg/km
Total weight of cable	370,55	kg/km
Minimum bending radius (single/repeated bending)	250	mm
Maximum cable pulling strength	1.200	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

**Electrical data****ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

**Date****12/05/2017****Responsible****Alberto Scardovi**

**Description**

Distribution and trunk coaxial cable with messenger rope - 75 Ohm

Outdoor cable for hung-up installation (Screening Class A+)

Coaxial Cables

**CAVEL®**

since 1968

**Data Sheet****34/145AP**

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		53 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		2,10	Ohm/km
Outer conductor resistance		2,60	Ohm/km
Loop resistance		4,70	Ohm/km
Sheat Insulation voltage (spark test)		12	kV
Maximum current (I <sub>eff</sub> )		34	A

## Structural return loss (SRL)

5 - 470 MHz	>25 dB
470 - 1000 MHz	>24 dB
1000 - 2000 MHz	>21 dB
2000 - 3000 MHz	>20 dB

## Screening Attenuation (SA) SA-Class A+

30 - 1000 MHz	>95 dB
1000 - 2000 MHz	>85 dB
2000 - 3000 MHz	>80 dB

Shield Transfer Impedance (Z<sub>t</sub>)Z<sub>t</sub>-Class A+

5 - 30 MHz	< 2,5 mΩ/m
------------	------------

## Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	0,50	862	6,40
10	0,70	1000	6,90
30	1,10	1750	9,40
50	1,40	2150	10,60
200	2,90	2400	11,50
300	3,60	3000	13,30
470	4,60		

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

## Date

12/05/2017

## Responsible

Alberto Scardovi


**Description**

Distribution and trunk coaxial cable with messenger rope - 75 Ohm

Outdoor cable for hung-up installation (Screening Class A+)



Data Sheet

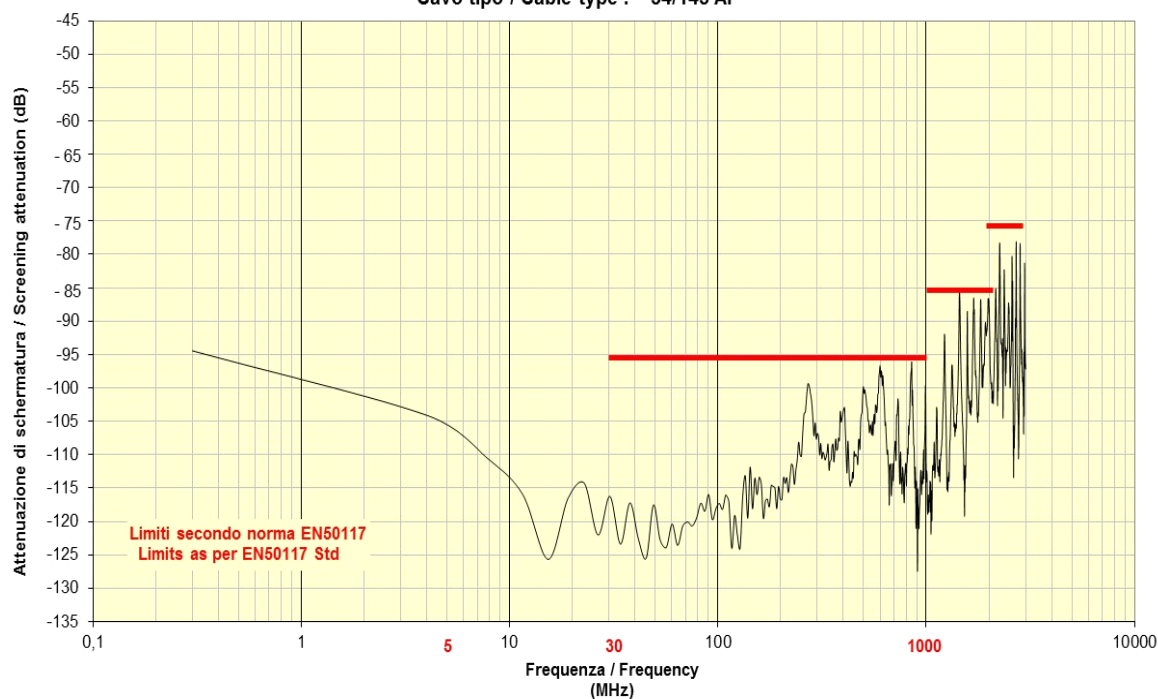**34/145AP****Attenuazione di schermatura / Screening Attenuation****Cavo classe A+ / A+ Class Cable****Cavo tipo / Cable type : 34/145 AP****Connectors**

<b>3,5/12M-46</b>	3,5/12" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 84,0 mm x 30,0 mm
<b>5/8MU-46</b>	5/8" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 84,0 mm x 31,0 mm
<b>FM-TL646</b>	Series F, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 76,0 mm x 31,0 mm
<b>IEC14M-46</b>	Series IEC (toolless), male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 84,0 mm x 31,0 mm
<b>SR01-46</b>	Adapter, for 11/50FC - 34/145, for UNDERGROUND (Hardline) installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

**12/05/2017**

Responsible

**Alberto Scardovi**