

## Description

Outdoor drop coaxial cable for digital reception - 75 Ohm

Outdoor installation cable

Coaxial Cables

CAVEL®

since 1968

Data Sheet

DG125



Ø	1,25	5,35	5,45	5,93	7,30
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(PE)

## Class CPR acc. to UE 305/2011 (DoP)

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-5

## Reaction to Fire

EN50575

## Construction data

Inner conductor of plain copper	(Cu)	Ø 1,25 ± 0,03	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 5,35 ± 0,10	mm
Aluminum/Polyester/Aluminum tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		63	%
Diameter over Braid		Ø 5,93	mm
Outer sheath of Polyethylene - black - with carbonblack	(PE)	Ø 7,30 ± 0,10	mm

Printed each meter by yellow ink-jet :

CAVEL DG125 MADE IN ITALY 75 Ohm Euroclass Fca EN50117-2-5 CEI-UNEL 36762 C-4 (U0 = 400V)

ULTRA HD / 4K gggaan m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	23,00	kg/km
Total weight of cable	47,21	kg/km
Minimum bending radius (single/repetead bending)	70	mm
Maximum cable pulling strength	250	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		14	Ohm/km
Outer conductor resistance		12	Ohm/km
Loop resistance		26	Ohm/km

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

12/05/2017

Responsible

PierPaolo Piccinini

**Description**

Outdoor drop coaxial cable for digital reception - 75 Ohm

Outdoor installation cable



**Data Sheet**

**DG125**

Sheat Insulation voltage (spark test)	5	kV
Maximum current (Ieff)	10	A
Structural return loss (SRL)		
5 - 470 MHz	>30 dB	
470 - 1000 MHz	>28 dB	
1000 - 2000 MHz	>26 dB	
2000 - 3000 MHz	>22 dB	
Screening Attenuation (SA)	SA-Class A	Transfer Impedance (Zt)
30 - 1000 MHz	>85 dB	5 - 30 MHz
1000 - 2000 MHz	>90 dB	
2000 - 3000 MHz	>90 dB	Zt-Class B
		< 11 mΩ/m


**Attenuation (at 20°C )**

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,40	862	15,90
10	2,00	1000	17,20
30	2,90	1750	23,10
50	3,70	2150	25,80
200	7,30	2400	27,40
300	9,00	3000	31,00
470	11,50		

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A / A Class Cable**

Cavo tipo / Cable type : **DG 125**

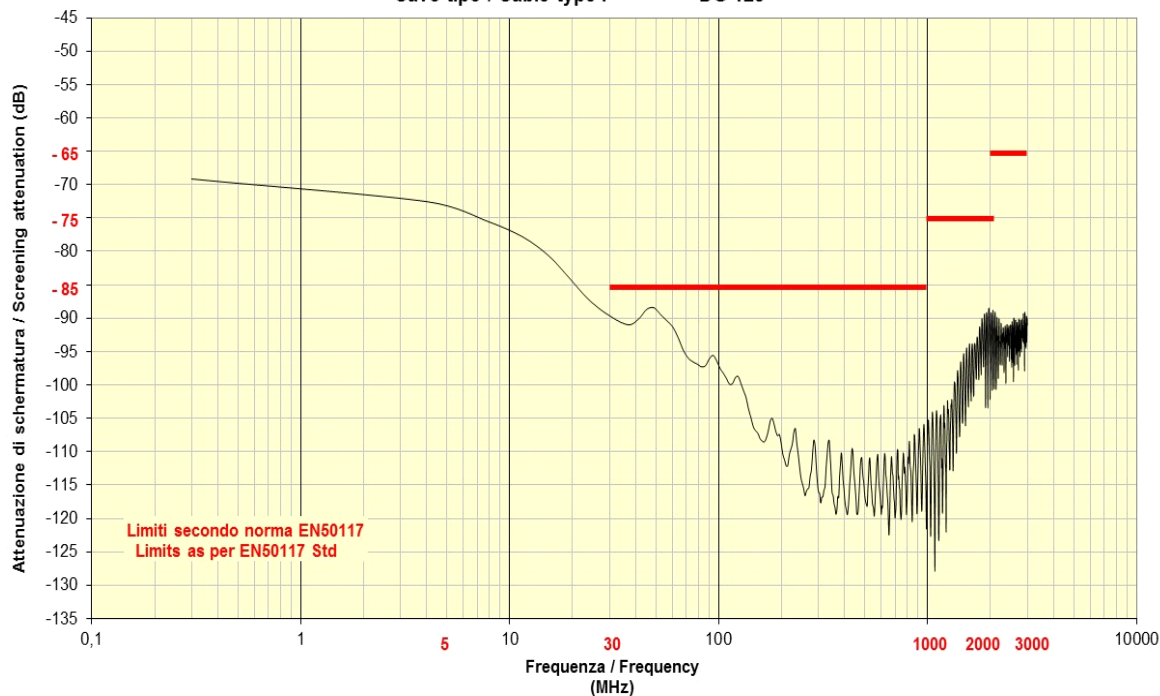

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

**Date**

**12/05/2017**

**Responsible**

**PierPaolo Piccinini**

**Description**

Outdoor drop coaxial cable for digital reception - 75 Ohm

Outdoor installation cable

**Data Sheet****DG125****Connectors****F125A** Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 24,0 mm x 12,0 mm**ITALIANA CONDUTTORI s.r.l.**Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

**12/05/2017**

Responsible

**PierPaolo Piccinini**