

Description


Hybrid multimedia cable

Coaxial, LAN and Loose Tube for Multimedia Applications



Data Sheet

MM965ZHB

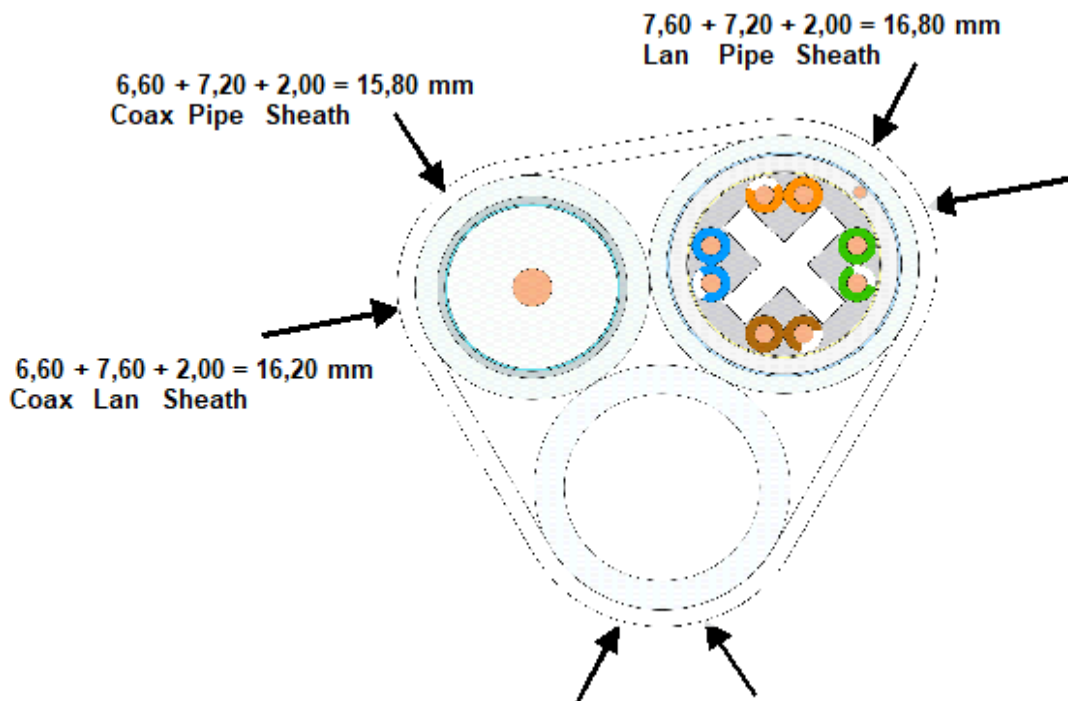

Attached Data Sheet

- RP913ZH
- LAN641ZH
- PIPE

Outer sheath of Thermoplastic material - white - halogen free and flame retardant

(LSZH)

Ø 16,80 x 16,20

mm

Printed each meter by blue ink-jet :

CAVEL MM965ZHB MADE IN ITALY MULTIMEDIA COAX RP913ZH + LAN641ZH + LOOSE TUBE ss/aa m

(ss=week, aa=year) (m=meter marking)

Physical data

Weight of copper conductors	39,00	kg/km
Total weight of cable	212,00	kg/km
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Giuseppe Guastella

Description

Outdoor drop coaxial cable - 75 Ohm

Outdoor installation cable (Screening Class A+)

Coaxial Cables

CAVEL®

since 1968

Data Sheet

RP913ZH

MM965ZHB



Ø	1,13	4,75	4,90	5,30	6,60
	(Cu)	(PEG)	(Al/Pet)	(CuSn)	(LSZH)

Class CPR acc. to UE 305/2011 (DoP)

Dca s2,d2,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-5

Reaction to Fire

IEC 60332-3-24

IEC 60754-2

IEC 61034

EN50575

Construction data

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,75 ± 0,10	mm
Outer Aluminum/Polyester tape longitudinally overlapped	(Al/Pet)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		72	%
Diameter over Braid		Ø 5,30	mm
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 6,60 ± 0,10	mm

Printed each meter by blue ink-jet :

CAVEL RP913ZH MADE IN ITALY 75 Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 Class A+ CEI-UNEL 36762

C-4 (U0 = 400V) ULTRA HD / 4K gggaa(n) m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

Physical data

Weight of copper conductors	19,07	kg/km
Total weight of cable	45,95	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km
Outer conductor resistance		10,70	Ohm/km
Loop resistance		28,70	Ohm/km
Sheat Insulation voltage (spark test)		3	kV

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Outdoor drop coaxial cable - 75 Ohm

Outdoor installation cable (Screening Class A+)



Data Sheet

RP913ZH

MM965ZHB

Maximum current (I_{eff})

8

A

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)

SA-Class A++

Transfer Impedance (Z_t)

Z_t-Class A+

30 - 1000 MHz	>110 dB
1000 - 2000 MHz	>105 dB
2000 - 3000 MHz	>90 dB


5 - 30 MHz

< 2,5 mOhm/m

Attenuazione di schermatura / Screening Attenuation

Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type: RP913ZH

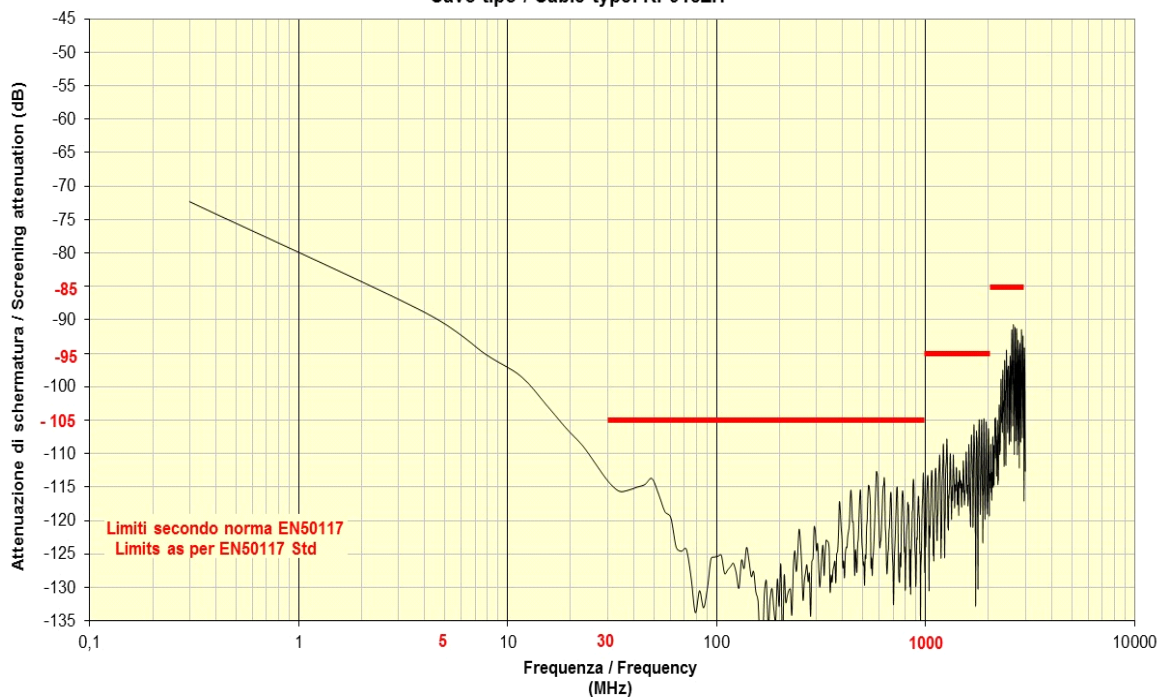

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Local Area Network Cable

Cat. 6 F/UTP 4x2xAWG23/1 LSZH

Coaxial Cables



CAVEL

since 1968

Data Sheet

LAN641ZH

MM965ZHB

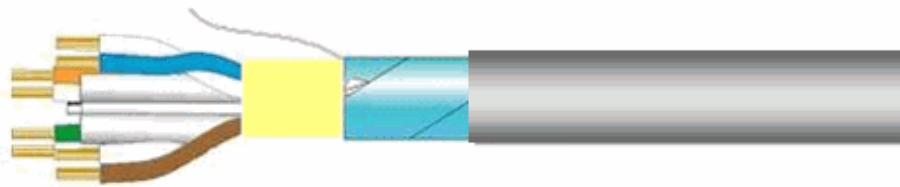

Ø	0,57	1,10		7,80
	(Cu)	(PE)	(Pet) (Al/Pet)	(LSZH)

Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EIA-TIA 568-B-2	ISO/IEC 11801	IEC 61156-5	EN50173
EN50288-5-1	NF C 15-100	XP C 90-483	XP C 93-531-16

Reaction to Fire

IEC60332-1	EN50575
------------	---------

Construction data

4 pairs with conductor of bare copper wires	(Cu)	Ø 0,57	mm
Dielectric of solid polyethylene	(PE)	Ø 1,10	mm
Polyester film spirally wrapped	(Pet)		

Composition

Twisted pairs, coloured by Standard TIA-568A

Drain wire of tinned copper			
Cross separator in Polyethylene	(PE)		
External Aluminum/Polyester tape	(Al/Pet)		
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 7,80	mm
Printed each meter by blue ink-jet :			

CAVEL LAN 641 ZH MADE IN ITALY CAT 6 F/UTP 4x2xAWG23 Euroclass Eca ISO-IEC 11801 EN50173 CEI-UNEL 36762 C-4 (U0 = 400V) gggaan - m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	19,92	kg/km
Total weight of cable	55,41	kg/km
Minimum bending radius x1/n	35/70	mm
Maximum cable pulling strength	100	N
Maximum tensile strength during the installation	100	N
Installation temperature	0 / +50	°C
Operating temperature	-20 / +60	°C

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

11/04/2020

Responsible

A. Bergaglio

Description

Local Area Network Cable

Cat. 6 F/UTP 4x2xAWG23/1 LSZH

**Data Sheet****LAN641ZH**

MM965ZHB

Physical data

Weight of copper conductors	19,92	kg/km
Total weight of cable	55,41	kg/km
Minimum bending radius x1/n	35/70	mm
Maximum cable pulling strength	100	N
Maximum tensile strength during the installation	100	N
Installation temperature	0 / +50	°C
Operating temperature	-20 / +60	°C

Electrical data

Characteristic impedance	100 MHz	100 ± 5	Ohm
Capacitance of Twisted Pair (@800Hz)		48	pF/m
Velocity Ratio		67 %	
DC Conductor Resistance		80	Ohm/km
Loop resistance		160	Ohm/km
Insulation resistance		> 5000	MOhm/km
Sheath Insulation Voltage (DC, 1 min)		1	kV
Coupling Attenuation		> 45	dB

Screening Attenuation (SA)

30 - 250 MHz	> 50 dB
250 - 1000 MHz	> 45 dB

Transfer Impedance (Zt)

1 MHz	< 35 mOhm/m
10 MHz	< 41 mOhm/m
30 MHz	< 110 mOhm/m
100 MHz	< 150 mOhm/m

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

11/04/2020

Responsible

A. Bergaglio

Description

PE/PP Side Pipe


Coaxial Cables

CAVEL[®]

since 1968

Data Sheet**PIPE**

MM965ZHB



Ø

5,5 / 7,2 mm

PE+PP

Side Pipe in Polyethylene+Polypropylene blend

(PE+PP)

Inner Ø 5,50 ± 0,20 mm

Outer Ø 7,20 ± 0,20 mm

Physical data

Weight

15,00 kg/km

Maximum Blowing Pressure

20 bar

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

01/12/2017

Responsible

Giuseppe Guastella