

## Description

RG coaxial cable as per MIL-C-17 - 50 Ohm



## Data Sheet

RG58C/UZHN

19x0,18



Ø	0,90	2,95	3,43	5,00
	(CUSn)	(PE)	(CuSn)	(LSZH)

## Standards

MIL-C-17

## Construction data

Inner conductor of stranded tinned copper wires	(CUSn)	19x0,18	Ø 0,90 ± 0,01	mm
Dielectric of solid polyethylene	(PE)		Ø 2,95 ± 0,10	mm
Braid of tinned copper wires	(CuSn)			
Braid optical coverage (IEC 96-1)			93	%
Diameter over Braid			Ø 3,43	mm
Outer sheath of Thermoplastic material - black - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)		Ø 5,00 ± 0,10	mm
Printed each meter by yellow ink-jet :				

CAVEL - RG 58C/U ZHN - MADE IN ITALY - 50 Ohm MIL-C-17 gggaan

(gggaan=batch)

## Physical data

Weight of copper conductors	16,60	kg/km
Total weight of cable	38,30	kg/km
Minimum bending radius (single/repeated bending)	25/50	mm
Maximum cable pulling strength	90	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

## Electrical data

Characteristic impedance	50 ± 2	Ohm
Capacitance (@1kHz)	100 ± 2	pF/m
Velocity Ratio	66 %	
Inner conductor resistance	38,50	Ohm/km
Outer conductor resistance	16,50	Ohm/km
Loop resistance	55	Ohm/km
Sheat Insulation voltage (spark test)	5	kV
Structural return loss (SRL)	Max. power	
30 - 300 MHz	>26 dB	100 MHz 200 W 400 MHz 60 W
300 - 600 MHz	>25 dB	1000 MHz 35 W
600 - 1000 MHz	>24 dB	
Screening Attenuation (SA)		
30 - 1000 MHz	>50 dB	

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

## Description

RG coaxial cable as per MIL-C-17 - 50 Ohm

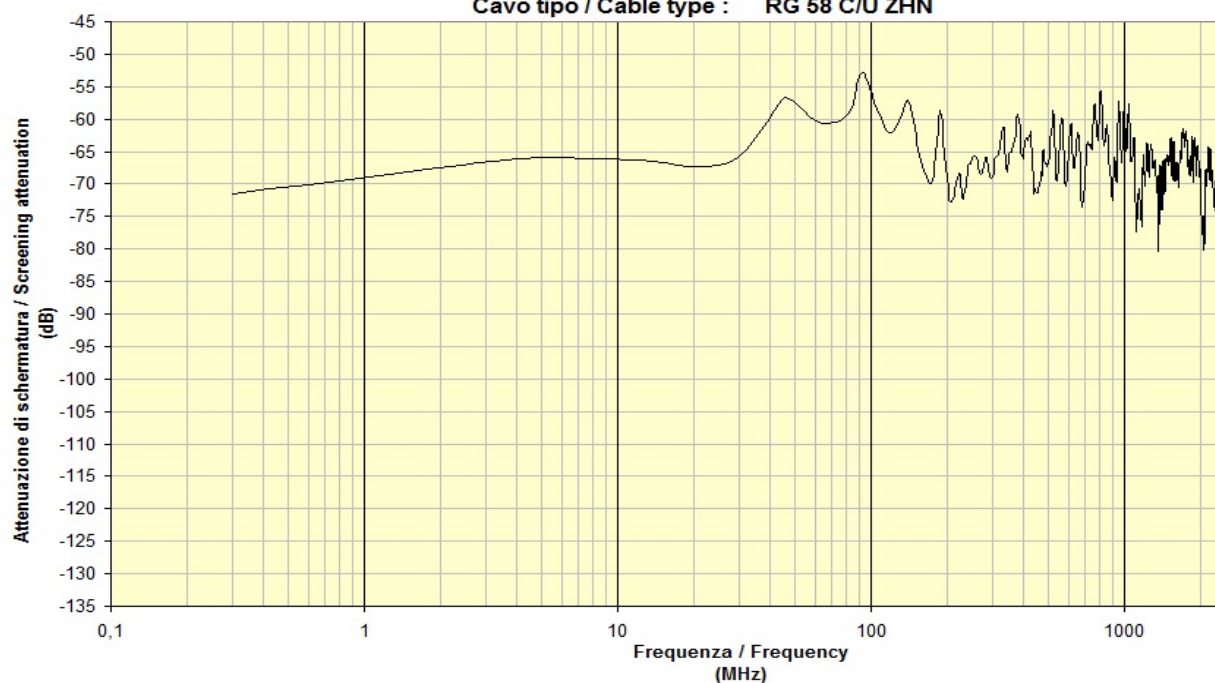


## Data Sheet

**RG58C/UZHN**

Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
50	10,70	470	38,70
200	23,50	800	53,38
300	29,60	1000	61,10

**Attenuazione di schermatura / Screening Attenuation**Cavo tipo / Cable type : **RG 58 C/U ZHN****ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

**29/02/2016**

Responsible

**Alberto Scardovi**