

## Description

RG coaxial cable as per MIL-C-17 - 75 Ohm

Coaxial Cables

**CAVEL®**

since 1968

## Data Sheet

**RG59B/U**

Ø	0,58	3,70	4,30	6,15
	(FeCu)	(PE)	(Cu)	(PVCII)

**Standards**

MIL-C-17

**Construction data**

Inner conductor of copper clad steel	(FeCu)	Ø 0,58 ± 0,02	mm
Dielectric of solid polyethylene	(PE)	Ø 3,70 ± 0,10	mm
Braid of annealed copper wires	(Cu)		
Braid optical coverage (IEC 96-1)		94	%
Diameter over Braid		Ø 4,30	mm
Outer sheath of non-migrating Polyvinylchloride - black - non-migrating as per MIL-C-17	(PVCII)	Ø 6,15 ± 0,10	mm

Printed each meter by yellow ink-jet :

**CAVEL - RG 59B/U - MADE IN ITALY - 75 Ohm MIL-C-17 gggaan**

(gggaan=batch)

**Physical data**

Weight of copper conductors	19,70	kg/km
Total weight of cable	51,38	kg/km
Minimum bending radius (single/repeated bending)	30/60	mm
Maximum cable pulling strength	200	N
Installation temperature	- 5	°C
Operating temperature	-40 / +80	°C

**Electrical data**

Characteristic impedance					75 ± 3	Ohm
Capacitance (@1kHz)					66 ± 2	pF/m
Velocity Ratio					66 %	
Inner conductor resistance					158	Ohm/km
Outer conductor resistance					11	Ohm/km
Loop resistance					169	Ohm/km
Sheat Insulation voltage (spark test)					3	kV
Structural return loss (SRL)				Max. power		
30 - 300 MHz	>28 dB		100 MHz	300 W	400 MHz	135 W
300 - 600 MHz	>25 dB		1000 MHz	75 W		
600 - 1000 MHz	>23 dB					

Screening Attenuation (SA)

30 - 1000 MHz	>45 dB
---------------	--------

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

Date

**29/02/2016**

Responsible

**PierPaolo Piccinini**

## Description

RG coaxial cable as per MIL-C-17 - 75 Ohm



## Data Sheet

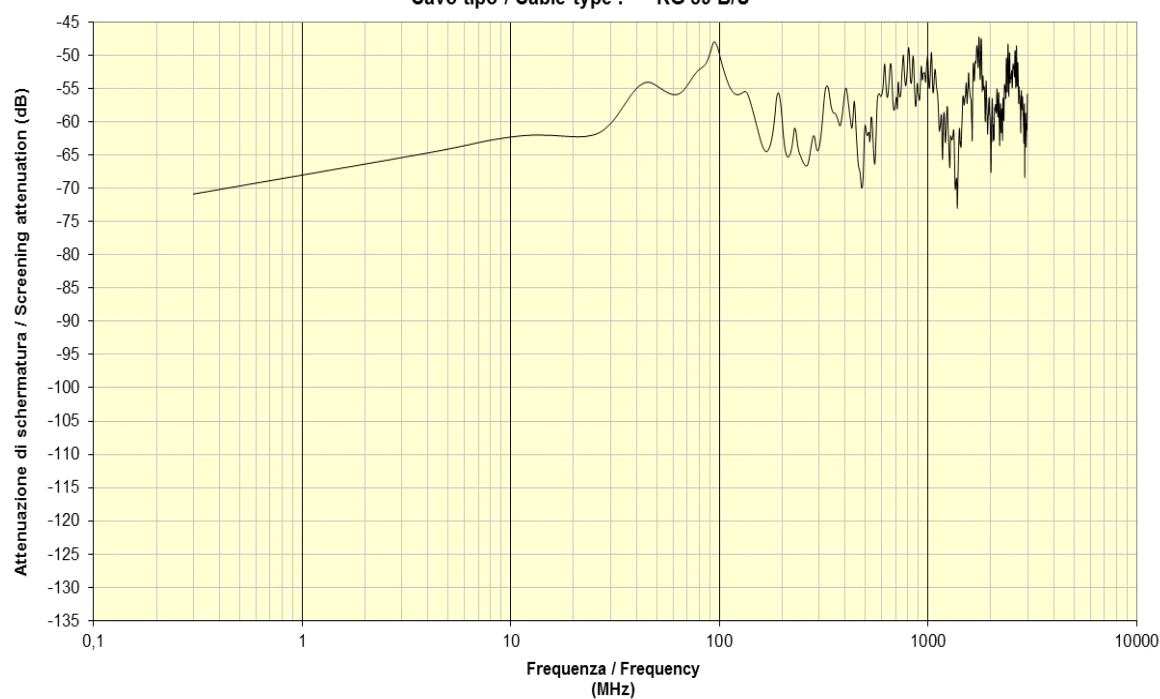
**RG59B/U**

## Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
50	7,70	470	25,40
200	16,00	800	34,00
300	19,90	1000	38,70

## Attenuazione di schermatura / Screening Attenuation

Cavo tipo / Cable type : RG 59 B/U

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

**29/02/2016**

Responsible

**PierPaolo Piccinini**