

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable (Screening Class A+)

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

SAT752F



Ø	1,13	4,80	4,90	5,30	6,60
	(Cu)	(PEG)	(Cu/Pet)	(Cu)	(PVC)

## Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-4

## Reaction to Fire

EN50575

## Application

DOCSIS 3.1 (Data Over Coax System)

## Construction data

Inner conductor of plain copper	(Cu)	Ø 1,13 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,80 ± 0,10	mm
Copper/Polyester tape longitudinally overlapped	(Cu/Pet)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of annealed copper wires	(Cu)		
Braid optical coverage (IEC 96-1)		72	%
Diameter over Braid		Ø 5,30	mm
Outer sheath of Polyvinylchloride - black - lead-free	(PVC)	Ø 6,60 ± 0,10	mm

Printed each meter by yellow ink-jet :

CAVEL SAT 752 F MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V)

ULTRA HD/4K gggaa(n) m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	22,75	kg/km
Total weight of cable	45,94	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Maximum cable pulling strength	150	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		18	Ohm/km

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

PierPaolo Piccinini

**Description**

Indoor drop coaxial cable - 75 Ohm  
 Indoor installation cable (Screening Class A+)



**Data Sheet**

**SAT752F**


Outer conductor resistance		12,50	Ohm/km
Loop resistance		30,50	Ohm/km
Sheat Insulation voltage (spark test)		3	kV
Maximum current (Ieff)		8	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>26 dB		
2000 - 3000 MHz	>22 dB		
Screening Attenuation (SA)	SA-Class A+	Transfer Impedance (Zt)	Zt-Class A
30 - 1000 MHz	>95 dB	5 - 30 MHz	< 4,5 mOhm/m
1000 - 2000 MHz	>100 dB		
2000 - 3000 MHz	>85 dB		

**Attenuation (at 20°C )**

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	1,40	862	16,70
10	2,00	1000	18,00
30	2,90	1750	24,50
50	3,80	2150	27,50
200	7,70	2400	29,00
300	9,40	3000	33,00
470	12,10		

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A+ / A+ Class Cable**  
 Cavo tipo / Cable type : **SAT752F**

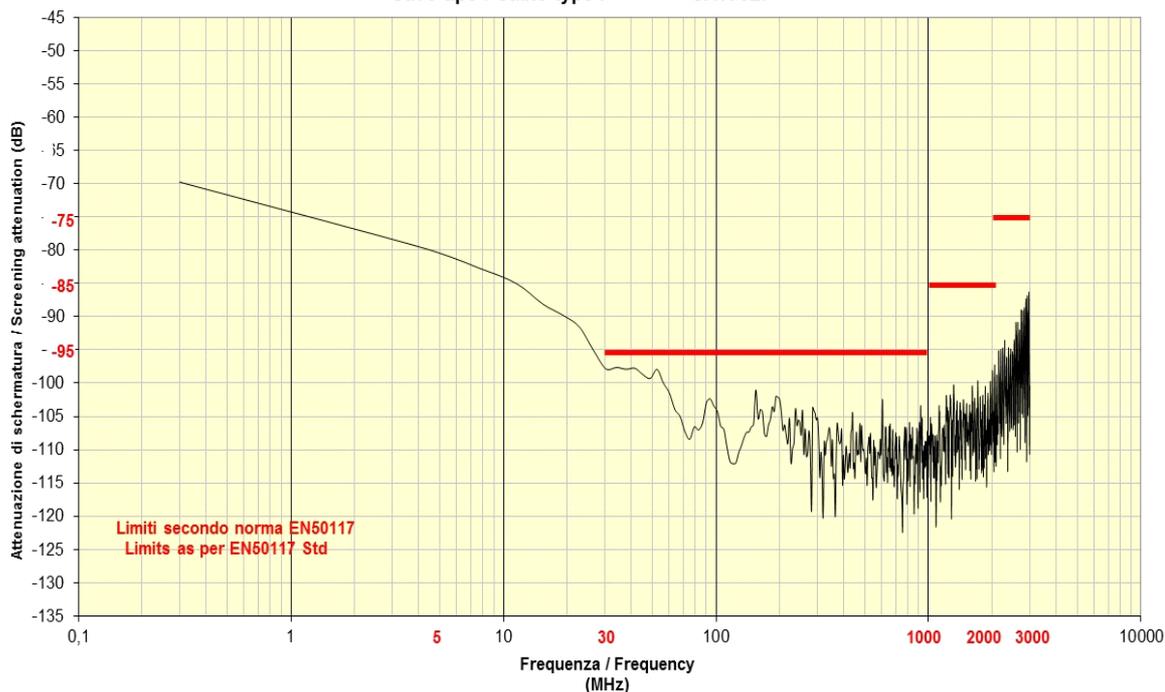

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

Date

**29/02/2016**

Responsible

**PierPaolo Piccinini**

**Description**

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable (Screening Class A+)

**Data Sheet****SAT752F****Connectors**

<b>BNCC703</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F703</b>	Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>F90</b>	Series F Crimp, F Crimp, for INDOOR installation
<b>FA703</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC7.0QM</b>	Series F Compression, Quick Mount, for OUTDOOR installation
<b>FC703</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCEM7.0C</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
<b>FCPO5.1C</b>	Series F Compression, Ø 5,1 Push-On, for OUTDOOR installation, nitin-plated brass
<b>FR703</b>	Series F Crimp, F crimp, "Rapid", for INDOOR installation
<b>IECF5.1C</b>	Series IEC (toolless), female, no tool, for INDOOR installation
<b>IECF90C</b>	Series IEC (toolless), Ø 5,1 90° female, for INDOOR installation
<b>IECF703</b>	Series IEC Compression, female, no tool, for OUTDOOR installation
<b>IECM5.1C</b>	Series IEC (toolless), male, no tool, for INDOOR installation
<b>IECM90C</b>	Series IEC (toolless), Ø 5,1 90° male, for INDOOR installation
<b>IECMC703</b>	Series IEC Compression, male, for OUTDOOR installation
<b>FC703C</b>	Series F Compression, F Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****29/02/2016****Responsible****PierPaolo Piccinini**