

Description

Triple shielded coaxial cable for Broadband Distribution Networks
75 Ohm
Triple shielded cable (Screening Class A+)



Data Sheet

TS22B



Ø	2,20	9,90	10,12	10,72	10,84	13,10
	(Cu)	(PEG)	(Al/Pet/Al/Sur)	(CuSn)	(Al/Pet)	(LSZH-FR+)

Class CPR acc. to UE 305/2011 (DoP)

B2ca s1a,d1,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-3

Reaction to Fire

EN50575

Application

DOCSIS 3.1 (Data Over Coax System)

CATV

4K-UHD

Indoor (+ Outdoor)

Construction data

Inner conductor of plain copper	(Cu)	Ø 2,20 ± 0,10	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 9,90 ± 0,15	mm
Aluminium/Polyester/Aluminium/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		64	%
External Aluminium/Polyester tape	(Al/Pet)	44 x 30/19	mm/µm
Diameter over Braid		Ø 10,84	mm
Outer sheath of Thermoplastic material - black - with carbonblack	(LSZH-FR+)	Ø 13,10 ± 0,20	mm

Printed each meter by yellow ink-jet :

**CAVEL TS 22 B MADE IN ITALY 75 Ohm Euroclass B2ca s1a,d1,a1 EN50117-2-3 Class A+ CEI-UNEL
36762 C-4 (U0 = 400V) ULTRA HD/4K gggaan m**

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	61,94	kg/km
Total weight of cable	169,60	kg/km
Minimum bending radius (single/repeated bending)	130	mm
Maximum cable pulling strength	600	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

Electrical data

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

14/05/2018

Responsible

Alberto Scardovi

Description

Triple shielded coaxial cable for Broadband Distribution Networks
 75 Ohm
 Triple shielded cable (Screening Class A+)

**Data Sheet****TS22B**

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		5	Ohm/km
Outer conductor resistance		4,50	Ohm/km
Loop resistance		9,50	Ohm/km
Sheat Insulation voltage (spark test)		8	kV
Maximum current (Ieff)		21	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>23 dB		
2000 - 3000 MHz	>20 dB		
Screening Attenuation (SA)	SA-Class A++	Shield Transfer Impedance (Zt)	Zt-Class A+
30 - 1000 MHz	>115 dB	5 - 30 MHz	< 2,5 mOhm/m
1000 - 2000 MHz	>100 dB		
2000 - 3000 MHz	>85 dB		

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	0,80	862	9,10
10	1,10	1000	9,80
30	1,50	1750	13,30
50	2,00	2150	14,90
200	4,00	2400	15,70
300	4,90	3000	18,30
470	6,40		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date**14/05/2018****Responsible****Alberto Scardovi**

Description

Triple shielded coaxial cable for Broadband Distribution Networks
75 Ohm
Triple shielded cable (Screening Class A+)




Data Sheet

TS22B

Attenuazione di schermatura / Screening Attenuation


Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type : TS 22 B

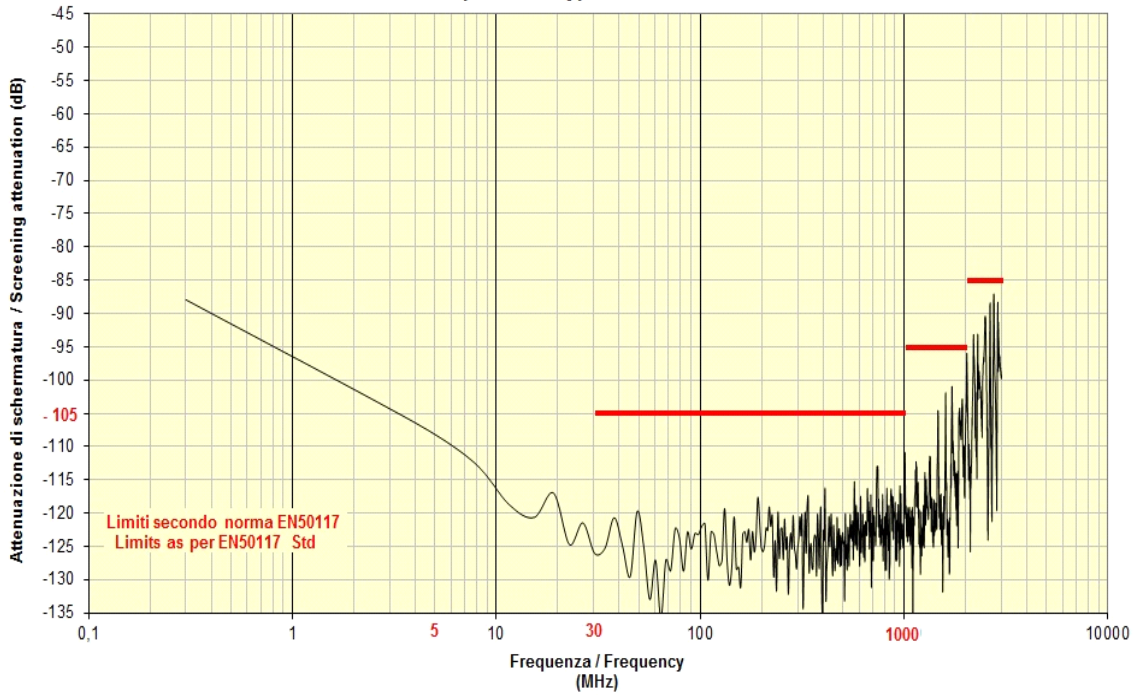

Transfer Impedance

Cable type: TS22B

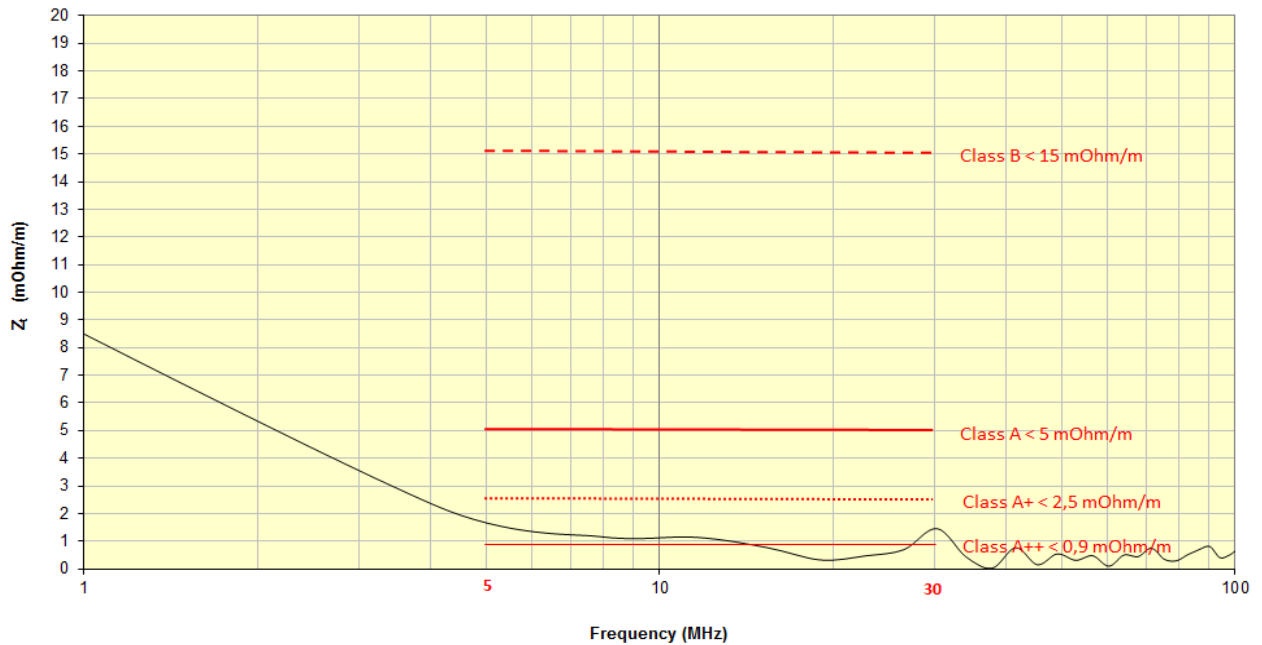

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

14/05/2018

Responsible

Alberto Scardovi

Description

Triple shielded coaxial cable for Broadband Distribution Networks
75 Ohm
Triple shielded cable (Screening Class A+)

**Data Sheet****TS22B****Connectors**

- FM-TL313** Series F, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 58,5 mm x 22,5 mm
- IEC14M-13** Series IEC (toolless), male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 70,0 mm x 23,0 mm
- 5/8MU-13** 5/8" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 59,0 mm x 22,5 mm
- 3,5/12M-TL313** 3,5/12" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 68,0 mm x 23,0 mm

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

14/05/2018

Responsible

Alberto Scardovi