

Description

Triple shielded coaxial cable for Broadband Distribution Networks 75 Ohm
Class A++



Data Sheet

TS27C



Ø	2,70	11,50	11,72	12,32	12,44	15,30
	(Cu)	(PEG)	(Al/Pet/Al/Sur)	(CuSn)	(Al/Pet)	(LSZH-FR)

Class CPR acc. to UE 305/2011 (DoP)

Cca s1a,d1,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

EN 50117-2-3

Reaction to Fire

EN50575

Application

DOCSIS 3.1 (Data Over Coax System)

CATV

4K-UHD

Indoor (+ Outdoor)

Construction data

Inner conductor of plain copper	(Cu)	Ø 2,70 ± 0,10	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 11,50 ± 0,15	mm
Aluminum/Polyester/Aluminum/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		64	%
Aluminum/Polyester j-fold and longitudinally overlapped	(Al/Pet)	48 x 30/19	mm/µm
Diameter over Braid		Ø 12,44	mm
Outer sheath of Thermoplastic material - black - halogen-free, low smoke, flame retardant	(LSZH-FR)	Ø 15,30 ± 0,20	mm

Printed each meter by yellow ink-jet :

**CAVEL TS 27 C MADE IN ITALY 75 Ohm Euroclass Cca s1a,d1,a1 EN50117-2-3 Class A++ CEI-UNEL
36762 C-4 (U0 = 400V) ULTRA HD / 4K gggaan m**

(gggaan=batch number m=meter marking)

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

08/05/2018

Responsible

Alberto Scardovi

Description

Triple shielded coaxial cable for Broadband Distribution
 Networks 75 Ohm
 Class A++

**Data Sheet****TS27C****Physical data**

Weight of copper conductors	83,15	kg/km
Total weight of cable	216,69	kg/km
Minimum bending radius (single/repeated bending)	150	mm
Maximum cable pulling strength	800	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 2	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		3,40	Ohm/km
Outer conductor resistance		3,50	Ohm/km
Loop resistance		6,90	Ohm/km
Sheat Insulation voltage (spark test)		8	kV
Maximum current (I _{eff})		25	A
Structural return loss (SRL)			
5 - 470 MHz	>25 dB		
470 - 1000 MHz	>24 dB		
1000 - 2000 MHz	>23 dB		
2000 - 3000 MHz	>22 dB		

Screening Attenuation (SA)	SA-Class A++	Transfer Impedance (Z _t)	Z _t -Class A++
30 - 1000 MHz	> 115 dB	5 - 30 MHz	< 0,9 mOhm/m
1000 - 2000 MHz	> 110 dB		
2000 - 3000 MHz	> 100 dB		

Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	0,78	862	7,54
10	1,00	1000	8,23
30	1,34	1350	9,72
50	1,73	1750	11,32
200	3,43	2150	12,90
300	4,34	2400	13,60
470	5,43	3000	15,30
800	7,40		

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date**08/05/2018****Responsible****Alberto Scardovi**

Description

Triple shielded coaxial cable for Broadband Distribution Networks 75 Ohm
Class A++




Data Sheet

TS27C

Attenuazione di schermatura / Screening Attenuation


Cavo classe A++ / A++ Class cable

Cavo tipo / Cable type : TS 27 C

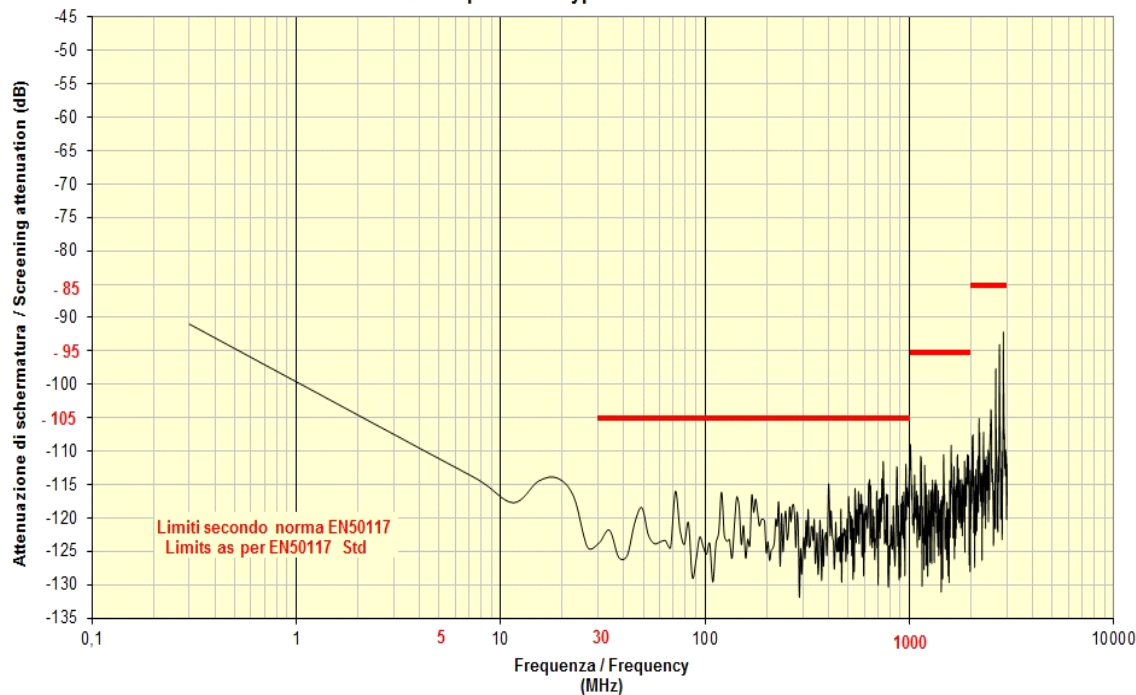

Transfer Impedance

Cable type: TS27C

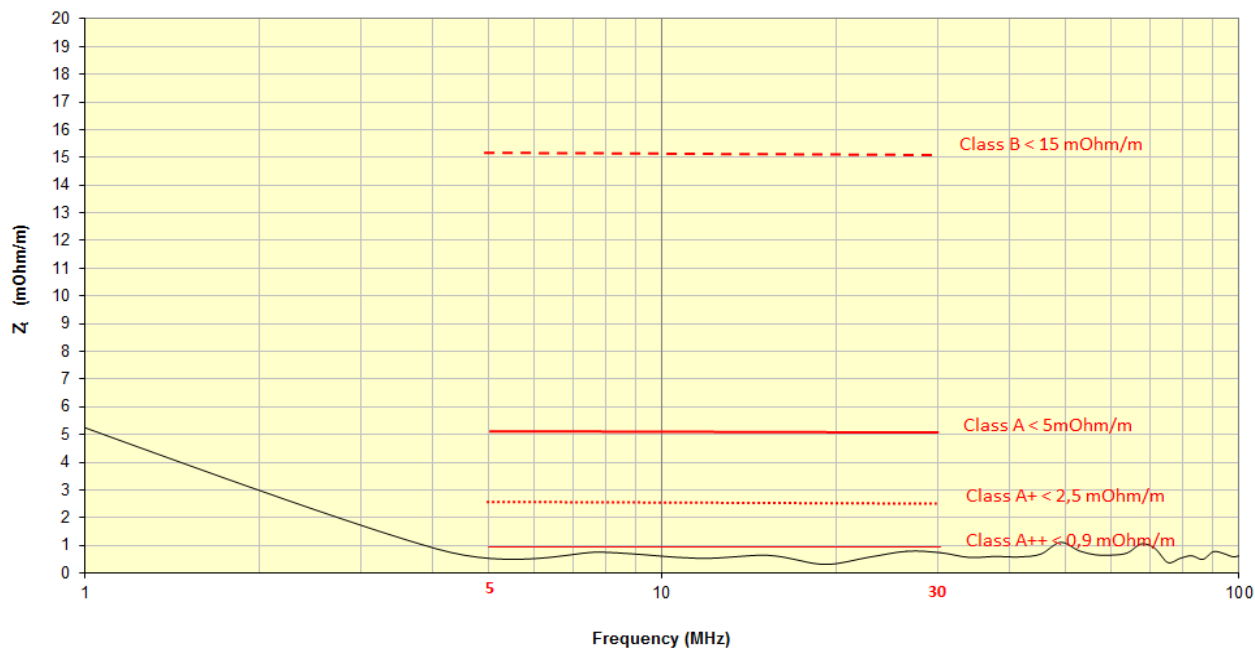

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

08/05/2018

Responsible

Alberto Scardovi

Description

Triple shielded coaxial cable for Broadband Distribution
Networks 75 Ohm
Class A++



Data Sheet

TS27C**Connectors**

- FM-TL444** Series F, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 76,0 mm x 31,0 mm
- IEC14M-44** Series IEC (toolless), male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm
- 5/8MU-44** 5/8" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm
- 3,5/12M-44** 3,5/12" connector, male, for UNDERGROUND (Hardline) installation, nitin-plated brass - 75,0 mm x 25,0 mm

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

08/05/2018

Responsible

Alberto Scardovi