

**Description**

Triple shielded coaxial cable for Broadband Distribution Networks  
75 Ohm  
Triple shielded cable (Screening Class A)



**Data Sheet**

**TS61LZH**



Ø	1,00	4,80	4,97	5,37	5,49	6,80
	(Cu)	(PEG)	(Al/Pet/Al/Sur)	(CuSn)	(Al/Pet)	(LSZH)

**Class CPR acc. to UE 305/2011 (DoP)**



The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

**Standards**

EN 50117-2-5

**Application**

DOCSIS 3.1 (Data Over Coax System)

**Construction data**

Inner conductor of plain copper	(Cu)	Ø 1,00 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 4,80 ± 0,10	mm
Aluminium/Polyester/Aluminium/Surlyne tape longitudinally overlapped and bonded to the dielectric	(Al/Pet/Al/Sur)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		45	%
Outer Aluminium/Polyester tape longitudinally overlapped	(Al/Pet)	23 x 30/19	mm/µm
Diameter over Braid		Ø 5,49	mm
Outer sheath of Thermoplastic material - grey (RAL 7001) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 6,80 ± 0,10	mm

Printed each meter by blue ink-jet :

**CAVEL TS 61 L ZH MADE IN ITALY 75 Ohm EN50117-2-5 Class A CEI-UNEL 36762 C-4 (U0 = 400V) ULTRA HD / 4K ss/aa m**

(ss=week, aa=year) (m=meter marking)

**Physical data**

Weight of copper conductors	12,59	kg/km
Total weight of cable	46,07	kg/km
Minimum bending radius (single/repeated bending)	35/70	mm
Maximum cable pulling strength	120	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

**Electrical data**

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		54 ± 2	pF/m
Velocity Ratio		82 %	
Inner conductor resistance		22,50	Ohm/km
Outer conductor resistance		14	Ohm/km
Loop resistance		36,50	Ohm/km

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

**Date**

**02/07/2018**

**Responsible**

**Alberto Scardovi**

**Description**

Triple shielded coaxial cable for Broadband Distribution Networks  
 75 Ohm  
 Triple shielded cable (Screening Class A)



Data Sheet

**TS61LZH**

Sheat Insulation voltage (spark test)		3	kV
Maximum current (leff)		6	A
Structural return loss (SRL)			
5 - 470 MHz	>30 dB		
470 - 1000 MHz	>28 dB		
1000 - 2000 MHz	>26 dB		
2000 - 3000 MHz	>22 dB		
Screening Attenuation (SA)	SA-Class A++	Shield Transfer Impedance (Zt)	Zt-Class A
30 - 1000 MHz	>105 dB	5 - 30 MHz	< 6 mOhm/m
1000 - 2000 MHz	>95 dB		
2000 - 3000 MHz	>85 dB		


Attenuation (at 20°C )

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
5	2,00	862	18,87
10	2,29	800	18,17
30	3,47	1000	20,44
50	4,60	1750	27,76
200	8,60	2150	31,09
300	10,78	2400	32,37
470	13,68	3000	37,31

**Attenuazione di schermatura / Screening Attenuation**

**Cavo classe A++ / A++ Class cable**

Cavo tipo / Cable type: TS61LZH

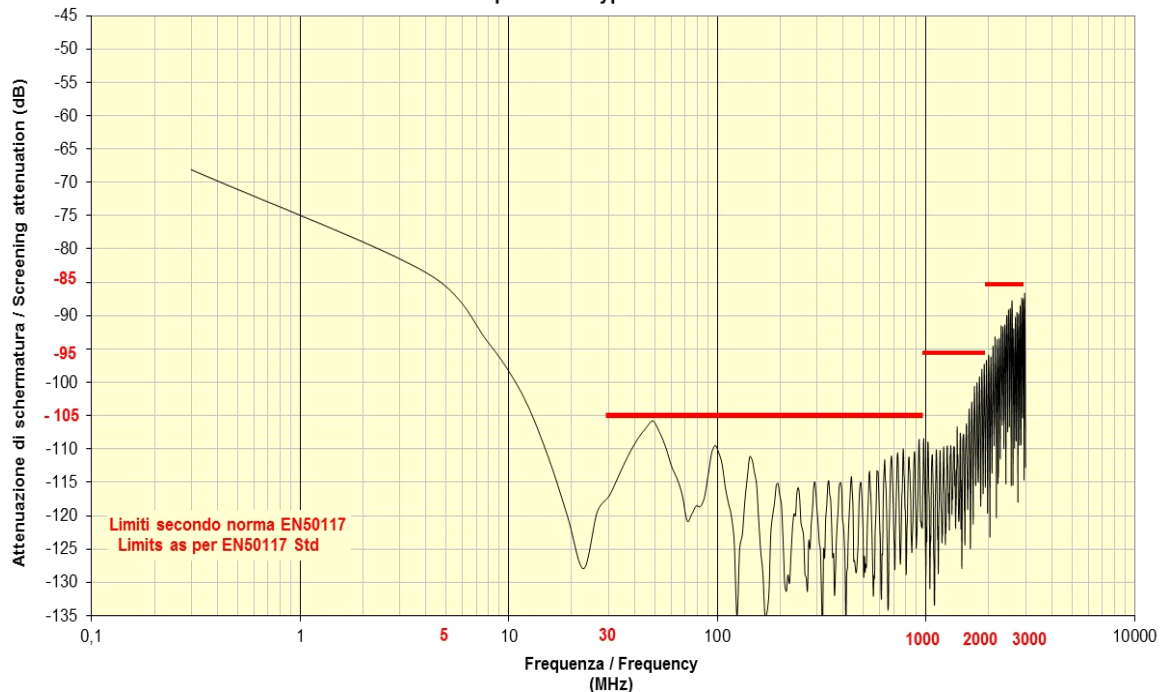

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

Date

02/07/2018

Responsible

Alberto Scardovi

**Description**

Triple shielded coaxial cable for Broadband Distribution Networks  
 75 Ohm  
 Triple shielded cable (Screening Class A)

**Data Sheet****TS61LZH****Connectors**

<b>BNCC703</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F703</b>	Series F Crimp, F Crimp, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FA17</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC7.0QM</b>	Series F Compression, Quick Mount, for OUTDOOR installation
<b>FC703</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCEM7.0C</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
<b>FCPO5.1C</b>	Series F Compression, Ø 5,1 Push-On, for OUTDOOR installation, nitin-plated brass
<b>IECF5.1C</b>	Series IEC (toolless), female, no tool, for INDOOR installation
<b>IECF90C</b>	Series IEC (toolless), Ø 5,1 90° female, for INDOOR installation
<b>IECF703</b>	Series IEC Compression, female, no tool, for OUTDOOR installation
<b>IECM5.1C</b>	Series IEC (toolless), male, no tool, for INDOOR installation
<b>IECM90C</b>	Series IEC (toolless), Ø 5,1 90° male, for INDOOR installation
<b>IECM703</b>	Series IEC Compression, male, for OUTDOOR installation
<b>FC703C</b>	Series F Compression, F Compression, for OUTDOOR installation

**ITALIANA CONDUTTORI s.r.l.**

Viale Zanotti 90 I - 27027 Gropello Cairoli  
 Tel +39-382.815150 Fax +39-0382.814212

**Date****02/07/2018****Responsible****Alberto Scardovi**