


DescriptionSecurity video cable - 75 Ohm with 2 electrical wires 0,5 mm²

LSZH UV resistant security video cable

**Data Sheet****VSHD70205**

Ø

6,35 x 7,75

(LSZH)

Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Reaction to Fire

EN 50575

Attached Data Sheet**Sheath Colour**

VSHD70

blue (RAL 5015)

CE22

black

CE23

red

Outer sheath of Thermoplastic material - blue (RAL 5015) - halogen-free, low smoke, flame retardant and UV-resistant

(LSZH)

Ø 7,75 x 6,35 ± 0,10

mm

Printed each meter by blue ink-jet :

CAVEL VS HD 70205 LSZH MADE IN ITALY 1000 V 75 Ohm Euroclass Eca gggaan - m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	18,40	kg/km
Total weight of cable	54,00	kg/km
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

Electrical data

Loop Resistance electrical wires	74	Ohm/km
Sheat Insulation voltage (spark test)	1	kV

Connectors

BNCC3.3C	Series BNC Compression, BNC Compression, for OUTDOOR installation
BNCC70	Series BNC Compression, BNC Compression, for OUTDOOR installation

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Security video cable - 75 Ohm

LSZH UV resistant security video cable

**Data Sheet****VSHD70**

VSHD70205



Ø	0,70	2,90	3,00	3,40	4,30
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(LSZH)

Class CPR acc. to UE 305/2011 (DoP)

Dca s2,d2,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Reaction to Fire

EN 50575

Construction data

Inner conductor of plain copper	(Cu)	Ø 0,70 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 2,90 ± 0,10	mm
Aluminum/Polyester/Aluminum tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		73	%
Diameter over Braid		Ø 3,40	mm
Outer sheath of Thermoplastic material - blue (RAL 5015) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)	Ø 4,30 ± 0,10	mm

Printed each meter by blue ink-jet :

CAVEL VS HD 70 LSZH MADE IN ITALY 75 Ohm Euroclass Dca s2,d2,a1 EN50117-2-5 CEI-UNEL 36762 C-4
(U0 = 400V) gggaan m

(gggaan=batch number m=meter marking)

Physical data

Weight of copper conductors	10,04	kg/km
Total weight of cable	21,66	kg/km
Minimum bending radius (single/repeated bending)	20/40	mm
Maximum cable pulling strength	80	N
Minimum installation temperature	-5	°C
Operating temperature	-25 / +80	°C

Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		45,50	Ohm/km
Outer conductor resistance		19,60	Ohm/km
Loop resistance		65,10	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current (Ieff)		3	A

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
 Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

Description

Security video cable - 75 Ohm

LSZH UV resistant security video cable



Data Sheet

VSHD70

VSHD70205

Maximum Operating Range analog/digital

700 / 150

m

Structural return loss (SRL)

5 - 470 MHz	>30 dB
470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)

SA-Class A

Transfer Impedance (Zt)

Zt-Class B

30 - 1000 MHz	>90 dB
1000 - 2000 MHz	>75 dB
2000 - 3000 MHz	>65 dB

5 - 30 MHz

< 7 mOhm/m


Attenuation (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	Frequency [MHz]	Attenuation [dB/100m]
2	1,60	5	2,50
3	1,90	200	13,00
4	2,20	862	27,80

Attenuazione di schermatura / Screening Attenuation

Cavo classe A / A Class Cable

Cavo tipo / Cable type: VS HD 70

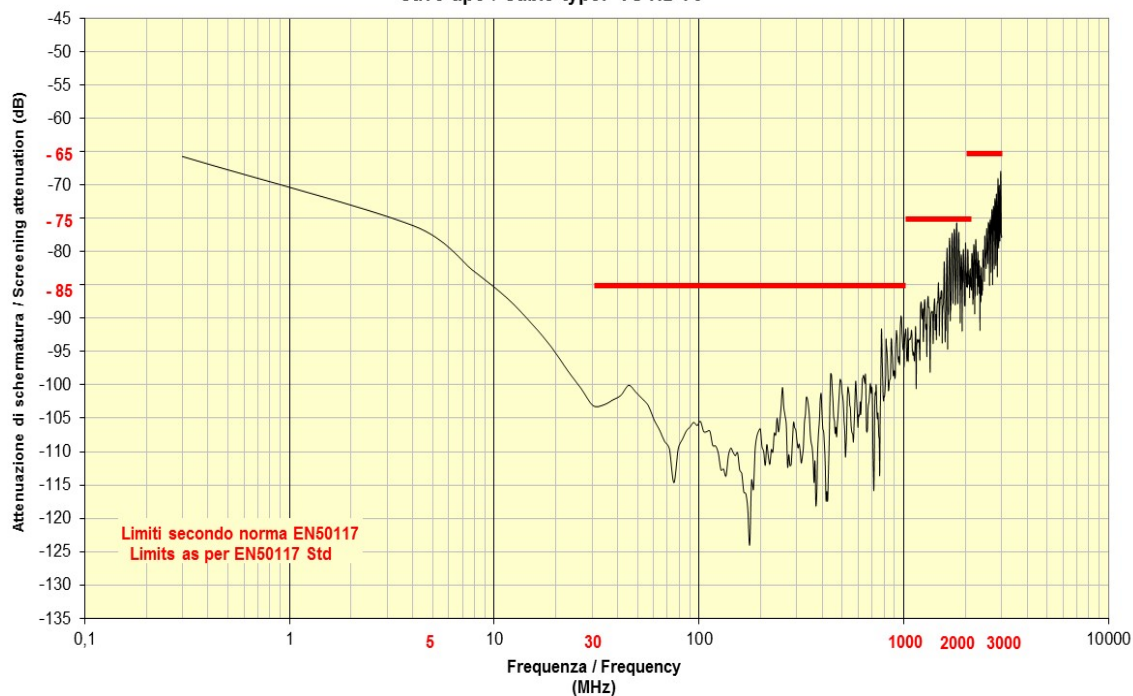**Connectors****BNCC3.3C**

Series BNC Compression, BNC Compression, for OUTDOOR installation

BNCC70

Series BNC Compression, BNC Compression, for OUTDOOR installation

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

DescriptionElectrical wire 0,5 mm²**Data Sheet****CE22**

VSHD70205

16x0,193



Ø

0,80

(Cu)

1,80

(LSZH)

Construction data

Electrical conductor of stranded bare copper wires 0,50 mm ²	(Cu)	16x0,193	Ø 0,80	mm
Outer sheath of Thermoplastic material - black - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)		Ø 1,80	mm

Physical data

Weight of copper conductors	4,10	kg/km
Total weight of cable	7,60	kg/km

Electrical data

Conductor resistance @ 20°C	39	Ohm/km
Maximum current (I _{eff})	6	A

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date**29/02/2016****Responsible****Alberto Scardovi**

DescriptionElectrical wire 0,5 mm²**Data Sheet****CE23**

VSHD70205

16x0,193



Ø

0,80

(Cu)

1,80

(LSZH)

Construction data

Electrical conductor of stranded bare copper wires 0,50 mm ²	(Cu)	16x0,193	Ø 0,80	mm
Outer sheath of Thermoplastic material - red (RAL 3000) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH)		Ø 1,80	mm

Physical data

Weight of copper conductors	4,10	kg/km
Total weight of cable	7,60	kg/km

Electrical data

Inner conductor resistance	39	Ohm/km
Maximum current	6	A

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date**29/02/2016****Responsible****Alberto Scardovi**