




### PLUG6AF

RJ45 plug for solid conductors, reusable, suitable for terminating FTP patch cables of Cat .6A and Cat.7.

*Spina chermata RJ45 per conduttori solidi, riutilizzabile, adatta*



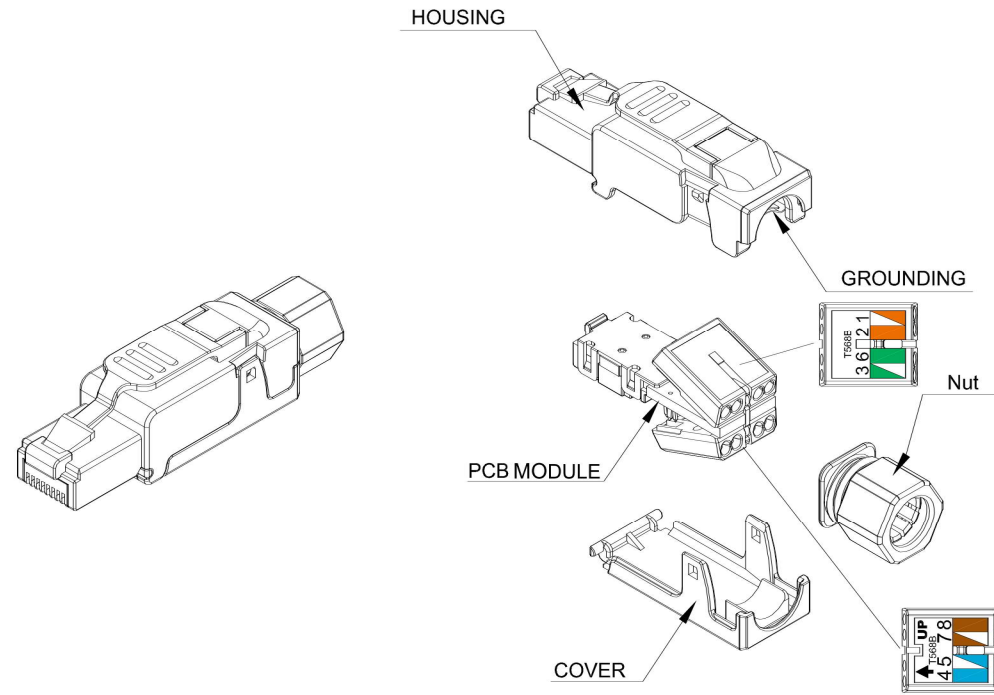

### TRANSMISSION PERFORMANCE

Meet all requirements specified in Patch Cord requirement of  
 ISO/IEC 11801, Category 6A  
 ANSI/TIA-568-C.2, Category 6A

### ELECTRICAL


Electrical Insulation Resistance : 500MΩ min. @100V d.  
 Dielectric Withstanding Voltage : 1000V D.C or A.C Peal  
 Contact to Contact;1500V D.C or A.C Peak,  
 Contact to Shield @ 60Hz for 1 Minute.

### MECHANICAL

IDC Wire Gauge : 23 ~ 26 AWG

### PHYSICAL

Housing : Zinc-alloy fully shielded  
 Contact pin : Phosphor Bronze Alloy Plated With  
 50 micro-inch of Gold  
 IDC : Phosphor Bronze Alloy With 100  
 micro-inch 100% Sn Alloy

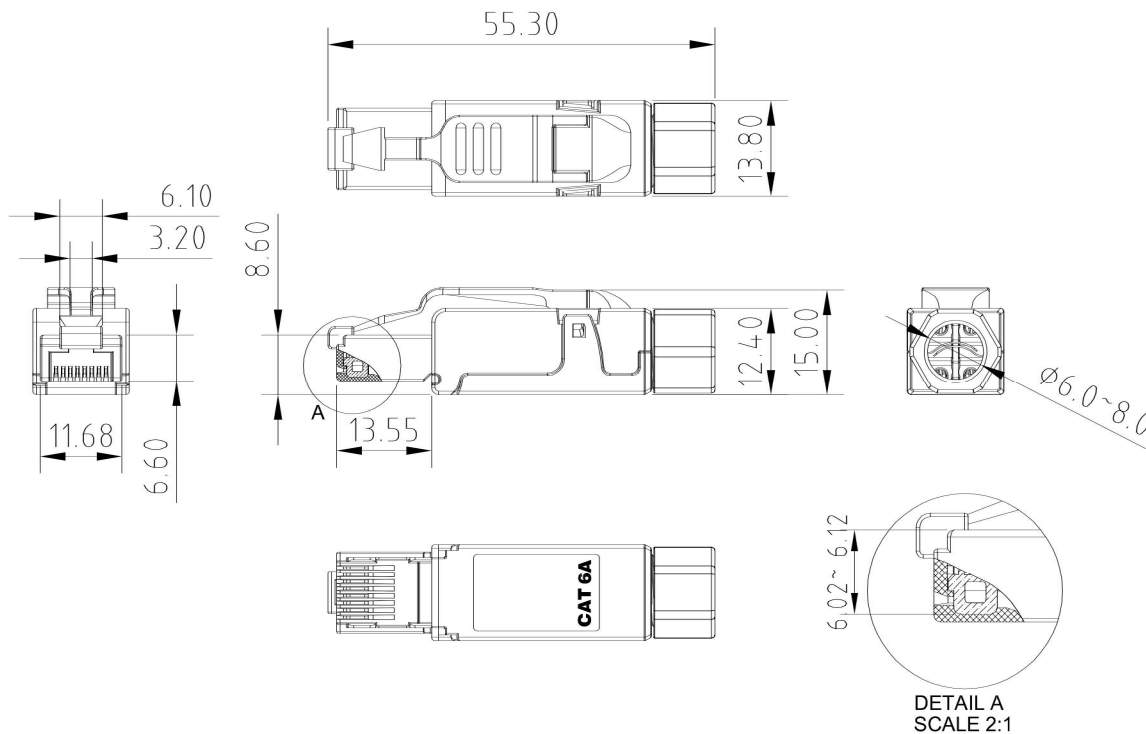

ITEM	PART NAME	Q'TY
1	HOUSING	1
2	COVER	1
3	GROUNDING	1
4	PCB MODULE	1
5	Nut	1
6	WIRING LABEL(UP)	1
7	WIRING LABEL(DOWN)	1