

Description


Local Area Network Cable

Cat. 7A S/FTP 4x2xAWG23/1 orange LSZH
1200MHz - 41% Braid Coverage



Data Sheet

LAN7A12004574CZHA

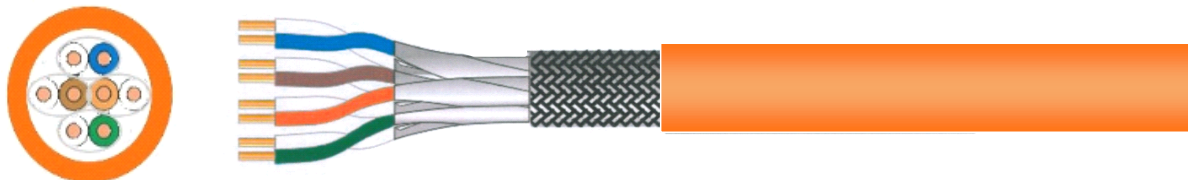

Ø	0,57	1,35		9,00
	(Cu)	(PEG)	(Al/Pet)	(CuSn)
				(LSZH-FR)

Class CPR acc. to UE 305/2011 (DoP)

Cca s1a,d0,a1

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

Standards

ISO/IEC 11801 Class Fa	EN50288-12-1 (fino a 1200 MHz)	EN50288-9-1	EN50173
IEC 61156	EIA-TIA 568	CEI-UNEL 36762	

Reaction to Fire

EN50575

Application

- Primary (Campus), Secondary (Riser), Tertiary (Horizontal)
- Up to Class FA (1000 MHz), up to 100 m (Channel)
- Over 1000 MHz, up to 50 m (Channel)
- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T; 25GBase-T
- IEEE 802.5: ISDN; TPDDI; ATM; CATV; Broadband Video
- Power over Ethernet (PoE)/PoE+

Construction data

Inner conductor of plain copper	(Cu)	Ø 0,57	mm
Insulation of physical foam Polyethylene	(PEG)	Ø 1,35	mm
Al/Pet foil shielded pairs, PiMF mode	(Al/Pet)		

Composition

Twisted pairs, coloured by Standard TIA-568A			
Braid of tinned copper wires	(CuSn)		
Braid Optical Coverage		41	%
Outer sheath of Thermoplastic material - orange (RAL 2003) - halogen-free, low smoke, flame retardant and UV-resistant	(LSZH-FR)	Ø 9,00	mm

Printed each meter by blue ink-jet :

CAVEL LAN 7A 1200 4574 C ZHA MADE IN ITALY CAT 7A S/FTP 4x2xAWG23/1 Euroclass Cca,s1a,d0,a1 ISO-IEC 11801 EN50173-1 CEI-UNEL 36762 C-4 (U0 = 400V) gggaan - m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

04/09/2020

Responsible

A. Bergaglio

Description

Local Area Network Cable

Cat. 7A S/FTP 4x2xAWG23/1 orange LSZH
1200MHz - 41% Braid Coverage

Coaxial Cables

CAVEL[®]

since 1968

Data Sheet

LAN7A12004574CZHA

Physical data

Weight of copper conductors	24,40	kg/km
Total weight of cable	89,34	kg/km
Minimum bending radius x1/n	40/80	mm
Max.Tensile Strength	150	N
Installation temperature	0 / +50	°C
Operating temperature	-20 / +60	°C

Electrical data

Characteristic impedance	1 - 100 MHz	100 ± 5	Ohm
Capacitance of Twisted Pair (@800Hz)		43	pF/m
Velocity Ratio		77 %	
DC Conductor Resistance		73	Ohm/km
Loop resistance		146	Ohm/km
Insulation resistance		> 5000	MOhm/km
Sheath Insulation Voltage (DC, 1 min)		1	kV
Coupling Attenuation		> 45	dB

Screening Attenuation (SA)

30 - 100 MHz	> 80 dB
100 - 1000 MHz	> 85 dB

Transfer Impedance (Zt)

1 MHz	< 5 mOhm/m
10 MHz	< 3 mOhm/m
30 MHz	< 3 mOhm/m

Transmission-Characteristic (at 20°C)

Frequency [MHz]	Attenuation [dB/100m]	RL [dB]	NEXT [dB]	ACR-N [dB/100m]
1	2,10		105,40	103,30
4	3,70	23,00	96,40	92,70
10	5,80	25,00	90,40	84,60
16	7,30	25,00	87,30	80,00
20	8,20	25,00	85,90	77,70
31,25	10,30	25,00	83,00	72,70
62,5	14,60	23,60	78,50	63,90
100	18,50	22,20	75,40	56,90
155,5	23,20	20,90	72,50	49,30
250	29,70	19,40	69,40	39,70
450	40,40	17,60	65,60	25,20
600	47,10	16,80	63,70	16,60
750	53,10	16,10	62,30	9,20
900	58,50	15,50	61,10	2,60
1000	61,90	15,20	60,40	-1,50
1200	68,40	14,70	59,20	-9,20

ITALIANA CONDUTTORI s.r.l.Viale Zanotti 90 I - 27027 Gropello Cairoli
Tel +39-382.815150 Fax +39-0382.814212

Date

04/09/2020

Responsible

A. Bergaglio