

## Description

Multimedia Cable

Coaxial cable - 75 Ohm - with twisted pair AWG 24


Coaxial Cables

CAVEL®

since 1968

## Data Sheet

SAT501AWG



Ø	0,80	3,5	3,60	4,00	5,00		8,20 x 6,00
	(Cu)	(PEG)	(Al/PET/Al)	(CuSn)	(PVC)	(PET)	(PVC)

## Class CPR acc. to UE 305/2011 (DoP)

Fca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Construction data

Outer non-migrating Polyester tape longitudinally overlapped (Pet)

## Attached Data Sheet

## Sheath Colour

SAT501	white (PVC)
CT19	orange
CT20	white/orange

Outer sheath of Polyvinylchloride - white (PVC) - lead-free (PVC) Ø 8,20 x 6,00 ± 0,20 mm

Printed each meter by blue ink-jet :

**CAVEL SAT 501 AWG MADE IN ITALY 75 Ohm EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V) ss/aa m**

(ss=week, aa=year) (m=meter marking)

## Physical data

Weight of copper conductors	12,54	kg/km
Total weight of cable	44,37	kg/km
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Alberto Scardovi

## Description

Multimedia Cable

Coaxial cable - 75 Ohm - with twisted pair AWG 24

Coaxial Cables

CAVEL®

since 1968


Data Sheet

SAT501AWG

## Attenuazione di schermatura / Screening Attenuation

Cavo classe B / B Class Cable

Cavo tipo / Cable type : SAT 501 AWG

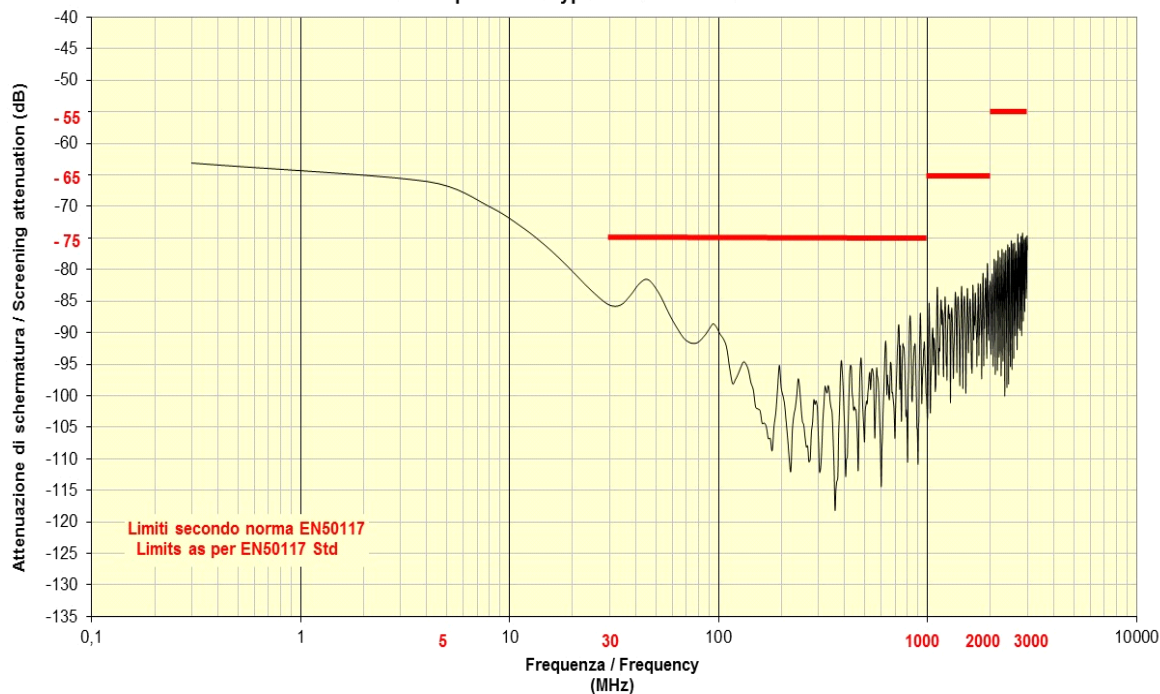

## Connectors

<b>BNCC3.9C</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation
<b>BNCC501</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F501</b>	Series F Crimp, Crimp F-59-ALM 3.9/6.4, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FA501</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC5.0QMS</b>	Series F Compression, Short Quick Mount, for OUTDOOR installation
<b>FC501</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCEM5.0C</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass
<b>FCPO3.9C</b>	Series F Compression, Ø 3,9 Push-On, for OUTDOOR installation, nitin-plated brass
<b>IECF905C</b>	Series IEC (toolless), Ø 3,9 90° female, for INDOOR installation
<b>IECM905C</b>	Series IEC (toolless), Ø 3,9 90° male, for INDOOR installation

ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli

Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Alberto Scardovi

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

Coaxial Cables

CAVEL®

since 1968

## Data Sheet

SAT501

SAT501AWG



Ø	0,80	3,50	3,60	4,00	5,00
	(Cu)	(PEG)	(Al/Pet/Al)	(CuSn)	(PVC)

## Class CPR acc. to UE 305/2011 (DoP)

Eca

The cable can be used in the field of application of the Construction Product Regulation (DoP) UE nr. 305/2011 for the class of performance specified on the related product label.

## Standards

EN 50117-2-4

## Construction data

Inner conductor of plain copper	(Cu)	Ø 0,80 ± 0,02	mm
Dielectric of physical foam polyethylene	(PEG)	Ø 3,50 ± 0,10	mm
Aluminum/Polyester/Aluminum tape longitudinally overlapped	(Al/Pet/Al)		
Water repellent sealing (dielectric)	(Jelly1)		
Braid of tinned copper wires	(CuSn)		
Braid optical coverage (IEC 96-1)		47	%
Diameter over Braid		Ø 4,00	mm
Outer sheath of Polyvinylchloride - white (PVC) - lead-free	(PVC)	Ø 5,00 ± 0,10	mm
Printed each meter by blue ink-jet :			

**CAVEL SAT 501 MADE IN ITALY 75 Ohm Euroclass Eca EN50117-2-4 CEI-UNEL 36762 C-4 (U0 = 400V)**  
gggaa(n) m

(ggg=day)(aa=year)(n=batch) (m=meter marking)

## Physical data

Weight of copper conductors	8,87	kg/km
Total weight of cable	24,20	kg/km
Minimum bending radius (single/repeated bending)	25/50	mm
Maximum cable pulling strength	90	N
Minimum installation temperature	-5	°C
Operating temperature	-40 / +80	°C

## Electrical data

Characteristic impedance	200 MHz	75 ± 3	Ohm
Capacitance (@1kHz)		52 ± 2	pF/m
Velocity Ratio		85 %	
Inner conductor resistance		35	Ohm/km
Outer conductor resistance		26	Ohm/km
Loop resistance		61	Ohm/km
Sheat Insulation voltage (spark test)		2,50	kV
Maximum current (Ieff)		4	A
Structural return loss (SRL)	5 - 470 MHz	>30 dB	

## ITALIANA CONDUTTORI s.r.l.

Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

## Date

29/02/2016

## Responsible

Pierpaolo Piccinini

## Description

Indoor drop coaxial cable - 75 Ohm

Indoor installation cable

Coaxial Cables

**CAVEL**

since 1968

Data Sheet

**SAT501**

SAT501AWG


470 - 1000 MHz	>28 dB
1000 - 2000 MHz	>26 dB
2000 - 3000 MHz	>22 dB

Screening Attenuation (SA)	SA-Class B	Transfer Impedance (Zt)	Zt-Class C
30 - 1000 MHz	>80 dB	5 - 30 MHz	< 23 mOhm/m
1000 - 2000 MHz	>80 dB		
2000 - 3000 MHz	>75 dB		

## Attenuazione di schermatura / Screening Attenuation

Cavo classe B / B Class Cable

Cavo tipo / Cable type : SAT 501

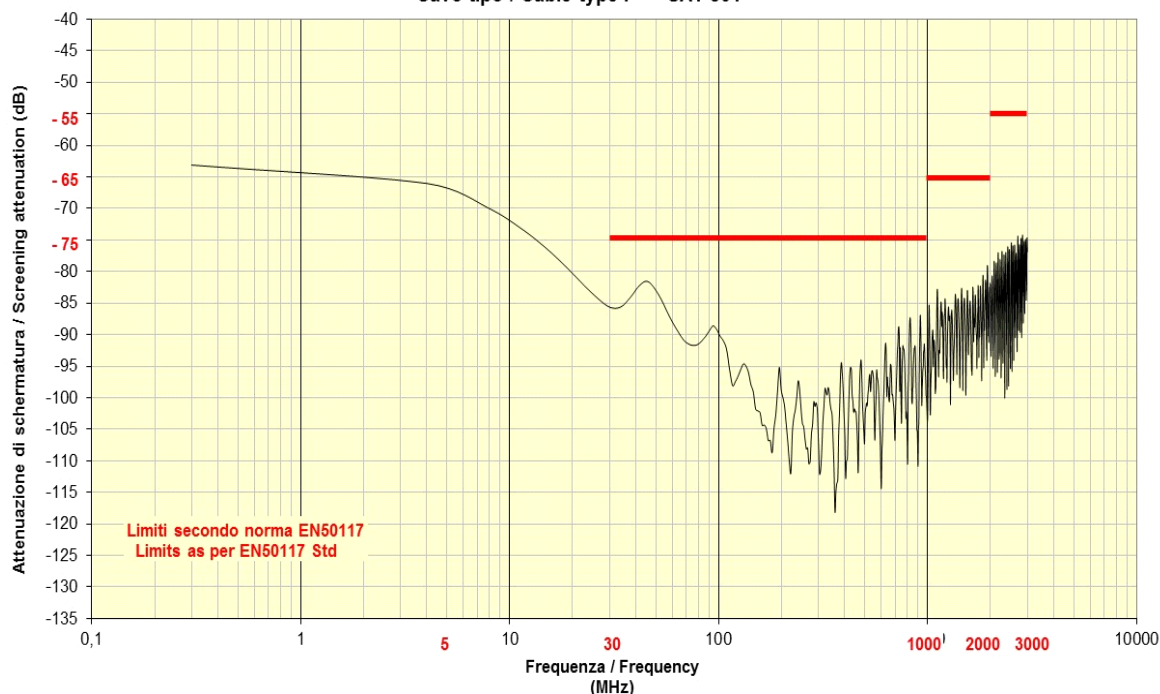

## Connectors

<b>BNCC3.9C</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation
<b>BNCC501</b>	Series BNC Compression, BNC Compression, for OUTDOOR installation, nitin-plated brass - 35,0 mm x 14,0 mm
<b>F501</b>	Series F Crimp, Crimp F-59-ALM 3.9/6.4, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FA501</b>	Series F Twist-On, F Twist-On, for INDOOR installation, nitin-plated brass - 21,0 mm x 12,0 mm
<b>FC5.0QMS</b>	Series F Compression, Short Quick Mount, for OUTDOOR installation
<b>FC501</b>	Series F Compression, F Compression, for OUTDOOR installation, nitin-plated brass - 30,0 mm x 12,0 mm
<b>FCPO3.9C</b>	Series F Compression, Ø 3,9 Push-On, for OUTDOOR installation, nitin-plated brass
<b>IECF905C</b>	Series IEC (toolless), Ø 3,9 90° female, for INDOOR installation
<b>IECM905C</b>	Series IEC (toolless), Ø 3,9 90° male, for INDOOR installation

**ITALIANA CONDUTTORI s.r.l.**Viale Zanotti 90 I - 27027 Gropello Cairoli  
Tel +39-382.815150 Fax +39-0382.814212

Date

29/02/2016

Responsible

Pierpaolo Piccinini

Ø	0,51	0,90
	(Cu)	(HDPE)

**Construction data**

Inner conductor of plain copper	(Cu)	Ø 0,51	mm
Outer sheath of High Density Polyethylene - orange	(HDPE)	Ø 0,90 ± 0,05	mm

**Physical data**

Copper Content	1,82	kg/km
Cable Weight	2,23	kg/km

Ø	0,51	0,90
	(Cu)	(HDPE)

**Construction data**

Inner conductor of plain copper	(Cu)	Ø 0,51	mm
Outer sheath of High Density Polyethylene - white/orange	(HDPE)	Ø 0,90	mm

**Physical data**

Copper Content	1,82	kg/km
Cable Weight	2,24	kg/km